PROXIMA LED 2550LM 830 IP65 II CL. OPAL WHITE (23W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	104107
Ingress protection:	IP65/54
Impact resistance:	IK10
Rated power of the luminaire [W]*:	23
Luminous flux [lm]*:	2550
Colour temperature [K]:	3000
Energy efficiency class:	E
Material of the body:	PP
Diffuser material:	PC
Diffuser type:	OPAL

CHARACTERISTICS

Surface-mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.


PROXIMA LED 2550LM 830 IP65 II CL. OPAL WHITE (23W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	104107	**Impact resistance:**	IK10
EAN:	5905963104107	**Ingress protection:**	IP65/54
Light source:	LED module	**Mounting version:**	surface
Rated power of the luminaire [W]:	23	**Working temperature [°C]:**	from -20 to +35
Supply voltage [V]:	220-240	**Number on the palette [pcs]:**	60
Frequency [Hz]:	50-60	**Net weight [kg]:**	1.300
Luminous flux [lm]:	2550	**Category type:**	bulkheads
Luminous efficacy [lm/W]:	111	**LED lifespan L70B50 [h]:**	118000
Energy efficiency class:	E	**LED lifespan L80B10 [h]:**	75000
Electrical protection class:	II	**LED lifespan L90B10 [h]:**	36000
Colour temperature [K]:	3000	**SDCM:**	3
Color rendering index (Ra) >:	80	**Ring material:**	ABS
Power factor:	0.90	**Mounting dimensions [mm]:**	165/165
Beam angle [°]:	120	**Dimensions of single box [mm]:**	100/390/390
Diffuser material:	PC	**AC voltage range [V]:**	220-240
Diffuser type:	OPAL	**Warranty [years]:**	5
Material of the body:	PP	**CE certificate:**	16/2026
Colour of the body:	white	**Manual:**	Download PDF
Ring colour:	white	**ISO Certificates:**	9001:2015, 14001:2015, 45001:2018, 50001:2018
Dimensions (H/W/T/S) [mm]:	ø390/110	**Plik LDT:**	Download

LIGHT CURVES

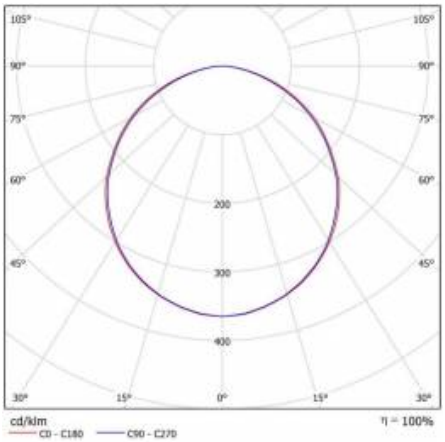

Card creation date: 20 January 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 16/2026

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl