

CAMEA LED EVO 2 9W KLOSZ MATOWY BIAŁA 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP44
Impact resistance:	IK10
Rated power of the luminaire [W]*:	10
Luminous flux [lm]*:	770 - 1750
Colour temperature [K]:	3000; 4000
SDCM:	≤ 4
Energy efficiency class:	E; F
Material of the body:	PP
Diffuser type:	OPAL

CHARACTERISTICS

Surface-mounted, round LED light fixture with integrated energy-saving light source LED, high luminous flux, and high ingress protection class IP44. Base and ring made of UV-resistant plastic. A specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Available in four ring colours. Optional equipment: radio motion sensor (RCR). Colour temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for indoor use (usable rooms, staircases, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


CAMEA LED EVO 2 9W KLOSZ MATOWY BIAŁA 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	x	Mounting version:	natynkowy
EAN:	x	Working temperature [°C]:	od -20 do +35
Light source:	moduł LED	Motion sensor:	yes
Nominal power [W]:	9	Number on the palette [pcs]:	100
Rated power of the luminaire [W]:	10	Net weight [kg]:	0.600; 0.670; 0.700; 0.770
Supply voltage [V]:	220 - 240; 220-240	Category type:	bulkheads
Frequency [Hz]:	50-60	LED lifespan L70B50 [h]:	105000
Luminous flux [lm]:	770 - 1750	LED lifespan L80B20 [h]:	66000
Energy efficiency class:	E; F	LED lifespan L90B10 [h]:	32000
Electrical protection class:	II	ETIM class:	EC002892
Colour temperature [K]:	3000; 4000	Beam angle [°]:	120
Colour rendering index:	>80	Diffuser material:	PC
SDCM:	≤ 4	Diffuser colour:	biały
Power factor:	0.54; 0.60; 0.95	Accessories included:	mounting pins
Diffuser type:	OPAL	Dimensions of single box [mm]:	310/90/310
Material of the body:	PP	Light distribution type:	symetryczny
Colour of the body:	biały; satynowy; srebrny; złoty	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Dimensions (H/W/T/S) [mm]:	ø300/90	Warranty [years]:	2; 5
Impact resistance:	IK10	CE certificate:	15/2022; 16/2022; 28/2018
Ingress protection:	IP44	Manual:	Download PDF

LIGHT CURVES

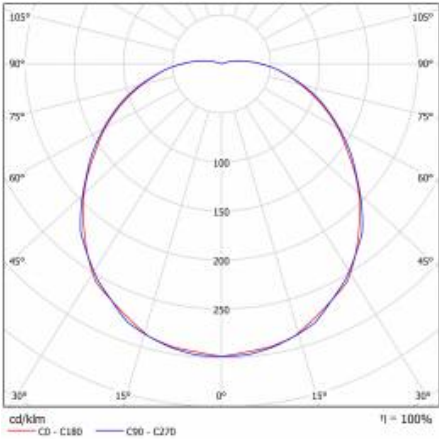

Card creation date: 26 January 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 28/2018

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl