

CAMEA LED EVO 2 9W KLOSZ MATOWY BIAŁA RCR4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	206399
Ingress protection:	IP44
Impact resistance:	IK10
Rated power of the luminaire [W]*:	10
Luminous flux [lm]*:	830
Colour temperature [K]:	4000
SDCM:	≤ 4
Energy efficiency class:	F
Material of the body:	PP
Diffuser type:	OPAL

CHARACTERISTICS

Surface-mounted, round LED light fixture with integrated energy-saving light source LED, high luminous flux, and high ingress protection class IP44. Base and ring made of UV-resistant plastic. A specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Available in four ring colours. Optional equipment: radio motion sensor (RCR). Colour temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for indoor use (usable rooms, staircases, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


CAMEA LED EVO 2 9W KLOSZ MATOWY BIAŁA RCR4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	206399	Material of the body:	PP
EAN:	5905963206399	Colour of the body:	white
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø300/90
Nominal power [W]:	9	Impact resistance:	IK10
Rated power of the luminaire [W]:	10	Ingress protection:	IP44
Supply voltage [V]:	220-240	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	830	Motion sensor:	yes
Luminous efficacy [lm/W]:	83	Number on the palette [pcs]:	100
Energy efficiency class:	F	Net weight [kg]:	0.670
Electrical protection class:	II	Category type:	bulkheads
Colour temperature [K]:	4000	ETIM class:	EC002892
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
SDCM:	≤ 4	Warranty [years]:	2
Power factor:	0.60	CE certificate:	28/2018
Diffuser type:	OPAL	Manual:	Download PDF

LIGHT CURVES

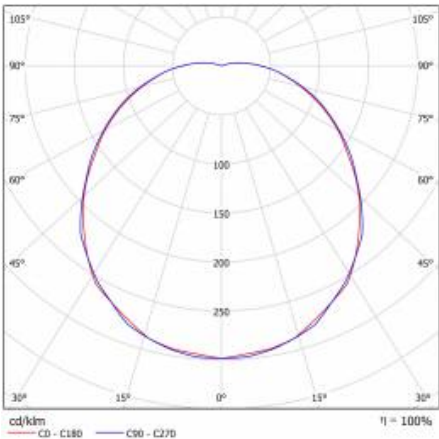

Card creation date: 26 January 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 28/2018

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl