

CAMEA SMD LED 12W MAT BIAŁY 3000K LC

DETAILED CARD



TECHNICAL PARAMETERS

Index:	066887
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	12
Luminous flux [lm]*:	1300
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	PP
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving lights source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for indoor use (usable rooms, staircases, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


CAMEA SMD LED 12W MAT BIAŁY 3000K LC

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	12	Dimensions (H/W/T/S) [mm]:	ø300/90
Light source:	LED module	Impact resistance:	IK10
Colour temperature [K]:	3000	Ingress protection:	IP44
Luminous flux [lm]:	1300	Mounting version:	surface
Rated power of the luminaire [W]:	13	Working temperature [°C]:	from -17 to +35
Diffuser type:	OPAL	Net weight [kg]:	0.600
Supply voltage [V]:	220-240	CE certificate:	397/2023
Frequency [Hz]:	50 - 60	Index:	066887
Energy efficiency class:	E	EAN:	5905963066887
Luminous efficacy [lm/W]:	100	Category type:	bulkheads
Electrical protection class:	I	Luminaire rated power 0min [W]:	14
Colour rendering index:	>80	ETIM class:	EC002892
SDCM:	≤ 3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	Warranty [years]:	5
Material of the body:	PP	LED lifespan L80B20 [h]:	60000
Ring colour:	white	Manual:	Download PDF
		Plik LDT:	Download

LIGHT CURVES

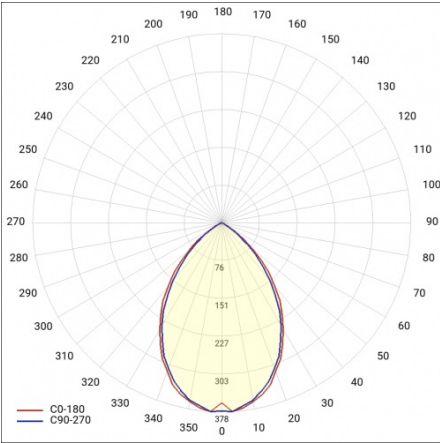

Card creation date:10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 397/2023

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl