

CORAL LED HV 260MM N 840LM IP44 RCR 840 (9W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	225994
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	9
Luminous flux [lm]*:	840
Colour temperature [K]:	4000
SDCM:	≤ 4
Energy efficiency class:	F
Material of the body:	PP

CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


CORAL LED HV 260MM N 840LM IP44 RCR 840 (9W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø260/108
Nominal power [W]:	9	Mounting dimensions [mm]:	140
Rated power of the luminaire [W]:	9.90	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP44
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	840	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	85	Motion sensor:	yes
Energy efficiency class:	F	Net weight [kg]:	1.200
Electrical protection class:	II	CE certificate:	
Colour temperature [K]:	4000	Index:	225994
Colour rendering index:	>80	EAN:	5905963225994
SDCM:	≤ 4	Category type:	bulkheads
Power factor:	0.40	Luminaire rated power Omin [W]:	9.90
LED lifespan L70B50 [h]:	81 000	ETIM class:	EC002892
Exchangeable source:	yes	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	OPAL	Warranty [years]:	5
Material of the body:	PP	Manual:	Download PDF
Ring colour:	white		


LIGHT CURVES

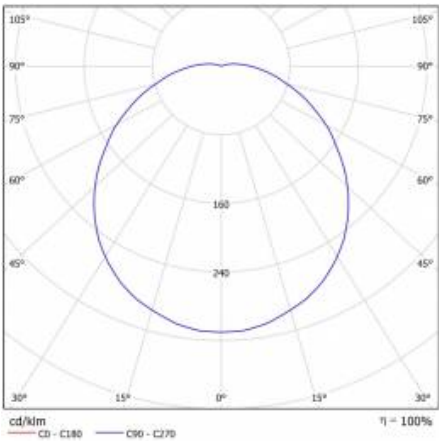

CORAL LED HV 260MM N 840LM IP44 RCR 840 (9W)

DETAILED CARD

TECHNICAL DETAILS



CORAL LED natynkowe prowadzenie przewodów

CORAL LED HV 260MM N 840LM IP44 RCR 840 (9W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support




CORAL- 10W service kit 10W 3000K (229831)




CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr:

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl