

# CORAL SMD LED 10W AW 3000K RING WHITE

DETAILED CARD



## TECHNICAL PARAMETERS

---

<b>Index:</b>	229985
<b>Ingress protection:</b>	IP44
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	10
<b>Luminous flux [lm]*:</b>	900
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	G
<b>Material of the body:</b>	PP

## CHARACTERISTICS

---

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

## APPLICATION

---

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


# CORAL SMD LED 10W AW 3000K RING WHITE

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	10	LED lifespan L70B50 [h]:	81 000
Light source:	LED module	Beam angle [°]:	120
Colour temperature [K]:	3000	Exchangeable source:	yes
Luminous flux [lm]:	900	Material of the body:	PP
Rated power of the luminaire [W]:	14	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP44
Diffuser type:	OPAL	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from 0 to +35
Ring colour:	white	Net weight [kg]:	0.650
Luminous efficacy [lm/W]:	64	CE certificate:	<a href="#">46/2014</a>
Emergency lighting [h]:	3	Index:	229985
Energy efficiency class:	G	EAN:	5905963229985
Dimensions (H/W/T/S) [mm]:	ø260/108	Category type:	bulkheads
Electrical protection class:	II	Luminaire rated power $P_{0min}$ [W]:	10
Colour rendering index:	>80	ETIM class:	EC002892
SDCM:	≤ 3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.59	Warranty [years]:	2 / 0.5 (bateria)
		Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

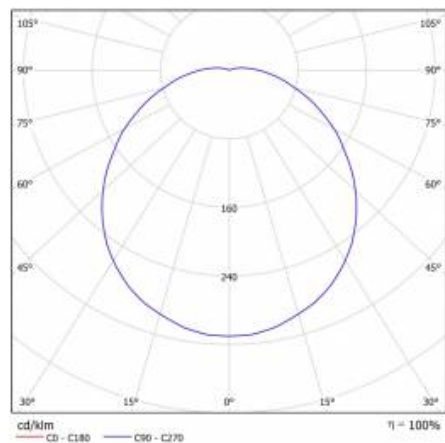


# CORAL SMD LED 10W AW 3000K RING WHITE

---

DETAILED CARD

## TECHNICAL DETAILS

---

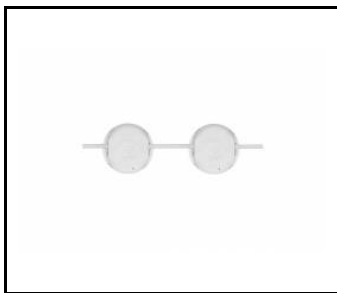

CORAL LED natynkowe prowadzenie przewodów

# CORAL SMD LED 10W AW 3000K RING WHITE

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support



CORAL- 10W service kit 10W 3000K (229831)



CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 46/2014