CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD



TECHNICAL PARAMETERS

Index:	229954
Ingress protection:	IP44
Impact resistance:	IK10
Nominal power [W]:	10
Luminous flux [lm]*:	970
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	G
Material of the body:	PP

CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation.The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation.Surface-mounted luminaire allows cable termination.

APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	**Ring colour:**	white
Nominal power [W]:	10	**Dimensions (H/W/T/S) [mm]:**	ø260/108
Rated power of the luminaire [W]:	14	**Impact resistance:**	IK10
Supply voltage [V]:	220-240	**Ingress protection:**	IP44
Frequency [Hz]:	50 - 60	**Mounting version:**	surface
Luminous flux [lm]:	970	**Working temperature [°C]:**	from 0 to +35
Luminous efficacy [lm/W]:	69	**Emergency lighting [h]:**	3
Energy efficiency class:	G	**Net weight [kg]:**	0.650
Electrical protection class:	II	**CE certificate:**	46/2014
Colour temperature [K]:	4000	**Index:**	229954
Color rendering index (Ra) >:	80	**EAN:**	5905963229954
SDCM:	3	**Category type:**	bulkheads
Power factor:	0.59	**Luminaire rated power 0min [W]:**	10
LED lifespan L70B50 [h]:	81 000	**ETIM class:**	EC002892
Beam angle [°]:	120	**Photobiological safety:**	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Exchangeable source:	yes	**Warranty [years]:**	2 / 0.5 (bateria)
Diffuser type:	OPAL	**Manual:**	Download PDF
Material of the body:	PP		


LIGHT CURVES

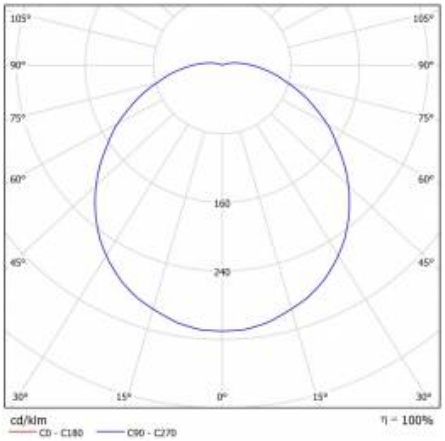

CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD

TECHNICAL DETAILS




CORAL LED natynkowe prowadzenie przewodów

CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support



CORAL- 10W service kit 10W 3000K (229831)




CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 46/2014

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl