

# CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	229954
<b>Ingress protection:</b>	IP44
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	10
<b>Luminous flux [lm]*:</b>	970
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	G
<b>Material of the body:</b>	PP

## CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

## APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.


# CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Ring colour:	white
Nominal power [W]:	10	Dimensions (H/W/T/S) [mm]:	ø260/108
Rated power of the luminaire [W]:	14	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP44
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	970	Working temperature [°C]:	from 0 to +35
Luminous efficacy [lm/W]:	69	Emergency lighting [h]:	3
Energy efficiency class:	G	Net weight [kg]:	0.650
Electrical protection class:	II	CE certificate:	<a href="#">46/2014</a>
Colour temperature [K]:	4000	Index:	229954
Colour rendering index:	>80	EAN:	5905963229954
SDCM:	≤ 3	Category type:	bulkheads
Power factor:	0.59	Luminaire rated power $P_{min}$ [W]:	10
LED lifespan L70B50 [h]:	81 000	ETIM class:	EC002892
Beam angle [°]:	120	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Exchangeable source:	yes	Warranty [years]:	2 / 0.5 (bateria)
Diffuser type:	OPAL	Manual:	<a href="#">Download PDF</a>
Material of the body:	PP		

## LIGHT CURVES

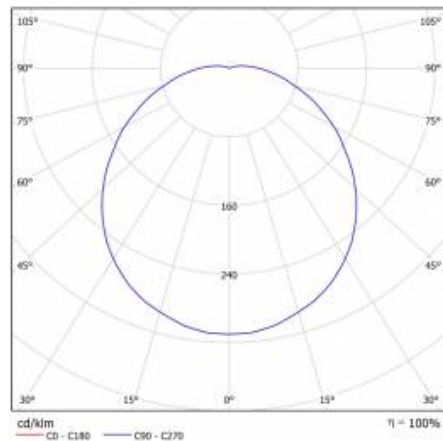


# CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

---

DETAILED CARD

## TECHNICAL DETAILS

---



CORAL LED natynkowe prowadzenie przewodów

# CORAL SMD LED 10W AW 4000K PIERŚCIEŃ BIAŁY

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
229831	CORAL- 10W service kit 10W 3000K
229770	CORAL- 10W service kit 10W 4000K
229848	CORAL- 10W service kit 10W RCR 3000K
229787	CORAL- 10W service kit 10W RCR 4000K
229763	CORAL - flush-mounting support



CORAL- 10W service kit 10W 3000K (229831)



CORAL- 10W service kit 10W 4000K (229770)



CORAL- 10W service kit 10W RCR 3000K (229848)



CORAL- 10W service kit 10W RCR 4000K (229787)



CORAL - flush-mounting support (229763)

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 46/2014