

BARIS 52 LED P GK CONNECTOR L 3975LM 840 IP20 I CL. DALI PLX ANODE CO 30W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	268694
Rated power of the luminaire [W]*:	30
Energy efficiency class:	D
Colour temperature [K]:	4000
Diffuser type:	OPAL

CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.

Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.


BARIS 52 LED P GK CONNECTOR L 3975LM 840 IP20 I CL. DALI PLX ANODE CO 30W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	268694	Colour of the body:	grey
EAN:	5905963268694	Dimensions (H/W/T/S) [mm]:	610/610/52
Rated power of the luminaire [W]:	30	Category of application:	office lighting
Luminous flux [lm]:	3975	DIMM DALI:	yes
Luminous efficacy [lm/W]:	133	Warranty [years]:	5
Energy efficiency class:	D	CE certificate:	343/2023
Colour temperature [K]:	4000	Manual:	Download PDF
LED lifespan L70B50 [h]:	150000	Environmental Product Declaration (EPD):	852/2025
LED lifespan L80B10 [h]:	100000	Version:	L connector
LED lifespan L90B10 [h]:	50000	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Diffuser type:	OPAL		

LIGHT CURVES

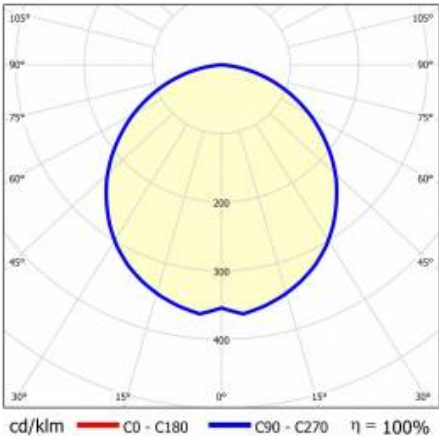

Card creation date:19 March 2026
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 343/2023

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl