
BARIS 52 LED P GK CONNECTOR T 3975LM 840 IP20 I CL. DALI PLX ANODE CO 30W

DETAILED CARD

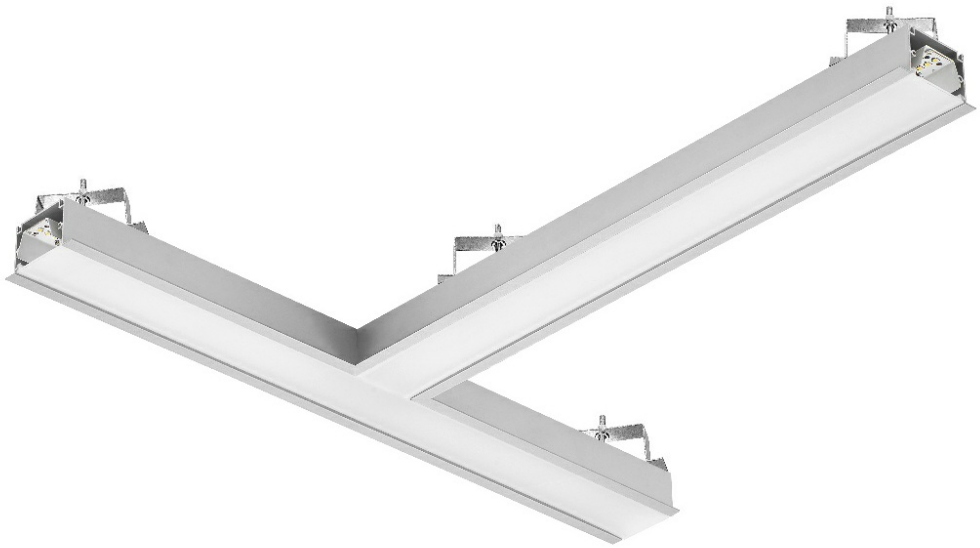

TECHNICAL PARAMETERS

Index:	268731
Rated power of the luminaire [W]*:	30
Energy efficiency class:	D
Colour temperature [K]:	4000
Diffuser type:	OPAL

CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.
Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.

BARIS 52 LED P GK CONNECTOR T 3975LM 840 IP20 I CL. DALI PLX ANODE CO 30W


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	268731
EAN:	5905963268731
Rated power of the luminaire [W]:	30
Luminous flux [lm]:	3975
Luminous efficacy [lm/W]:	133
Energy efficiency class:	D
Colour temperature [K]:	4000
LED lifespan L70B50 [h]:	150000
LED lifespan L80B10 [h]:	100000
LED lifespan L90B10 [h]:	50000
Diffuser type:	OPAL

Colour of the body:	grey
Dimensions (H/W/T/S) [mm]:	591/591/52
Category of application:	office lighting
DIMM DALI:	yes
Warranty [years]:	5
CE certificate:	343/2023
Manual:	Download PDF
Environmental Product Declaration (EPD):	852/2025
Version:	T connector
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018

LIGHT CURVES

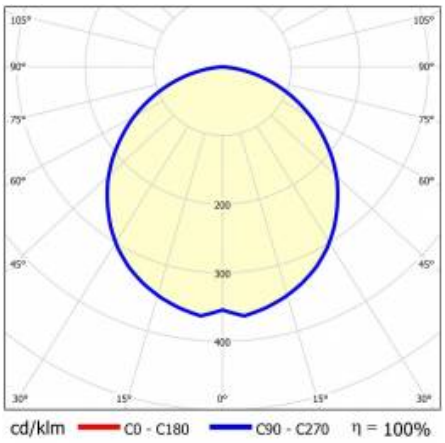

Card creation date: 19 March 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 343/2023

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl