

CAPELLA LED EDGE 320MM 1200LM IP54 830 (15W)

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP54
Nominal power [W]:	15
Luminous flux [lm]*:	1200
Colour temperature [K]:	3000
SDCM:	≤ 4
Energy efficiency class:	F
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	320/89

CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED EDGE 320MM 1200LM IP54 830 (15W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	white
Nominal power [W]:	15	Ring material:	ABS
Rated power of the luminaire [W]:	16	Dimensions (H/W/T/S) [mm]:	320/89
Supply voltage [V]:	220 - 240	Mounting dimensions [mm]:	160
Frequency [Hz]:	50 - 60	Impact resistance:	IK06
Source luminous flux [lm]*:	1775	Ingress protection:	IP54
Luminous flux [lm]:	1200	Mounting version:	surface
Luminous efficacy [lm/W]:	75	Working temperature [°C]:	from -10 to +35
Energy efficiency class:	F	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Electrical protection class:	II	Dimensions of single box [mm]:	325/325/98
Colour temperature [K]:	3000	Net weight [kg]:	0.800
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 4	CE certificate:	105/2018
Power factor:	0.50	Index:	949418
LED lifespan L70B50 [h]:	88000	EAN:	5905963949418
Beam angle [°]:	120	Category type:	bulkheads
Diffuser material:	PC	Version:	EDGE
Diffuser type:	OPAL	Product line:	standard
Diffuser colour:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	ABS	Manual:	Download PDF

LIGHT CURVES

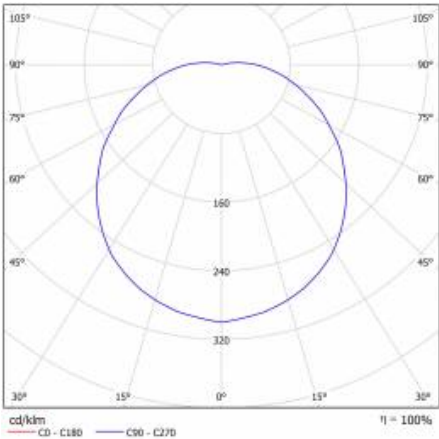

CAPELLA LED EDGE 320MM 1200LM IP54 830 (15W)

DETAILED CARD

TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date:10 September 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric andelectronic waste equipment regulations (WEEE).



Certificate CE - Nr: 105/2018



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl