

INDO LED PLX 34W 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380228
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	34
Luminous flux [lm]*:	3250
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PMMA

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO LED PLX 34W 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	380228	Optics material:	PMMA
Light source:	LED module	Material of the body:	powder coated steel
Nominal power [W]:	34	Dimensions (H/W/T/S) [mm]:	595/595/105
Rated power of the luminaire [W]:	34	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	3250	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	95	Net weight [kg]:	3.750
Energy efficiency class:	E	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	35/2016
Colour temperature [K]:	4000	EAN:	5905963380228
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Manual:	Download PDF
Diffuser material:	PMMA		

LIGHT CURVES

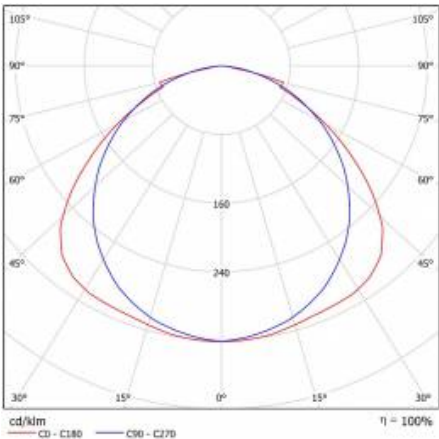

INDO LED PLX 34W 4000K

DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
999543	Plasterboard recessing kit 630x630 white



Plasterboard recessing kit 630x630 white (999543)

Card creation date: 06 December 2018
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 35/2016