

INDO LED PLX 34W 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	380228
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	34
Luminous flux [lm]*:	3250
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PMMA

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of perforated metal sheet. It provides comfortable and soft light.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps.


INDO LED PLX 34W 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	34	Optics material:	PMMA
Index:	380228	Material of the body:	powder coated steel
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	595/595/105
Light source:	LED module	Impact resistance:	IK07
Luminous flux [lm]:	3250	Ingress protection:	IP20
Rated power of the luminaire [W]:	34	Mounting version:	recessed
Energy efficiency class:	E	Working temperature [°C]:	from -20 to +35
Supply voltage [V]:	220-240	Net weight [kg]:	3.750
Frequency [Hz]:	50 - 60	Warranty [years]:	5
Luminous efficacy [lm/W]:	95	CE certificate:	35/2016
Electrical protection class:	I	EAN:	5905963380228
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	ETIM class:	EC002892
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	50000	Manual:	Download PDF
Diffuser material:	PMMA	Plik LDT:	Download

LIGHT CURVES

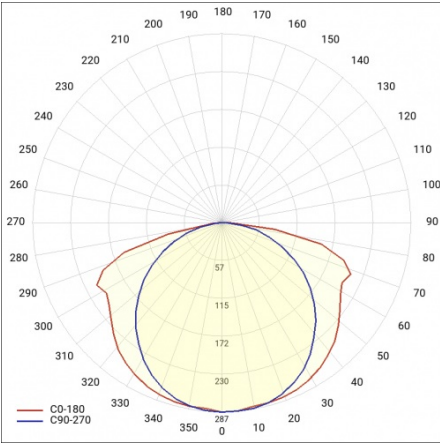

INDO LED PLX 34W 4000K

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)



Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 06 December 2018
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 35/2016