


# TRIPACT LED P 2300LM PMMA II KL. IP40/ IP20 595X595 830 (24W)

DETAILED CARD

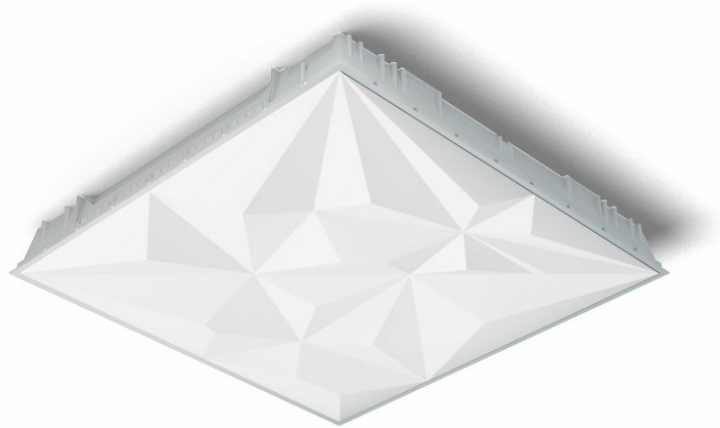

## TECHNICAL PARAMETERS

|   |         |
|---|---------|
| <b>Index:</b>                           | 658006  |
| <b>Ingress protection:</b>              | IP40/20 |
| <b>Nominal power [W]:</b>               | 24      |
| <b>Luminous flux [lm]*:</b>             | 2300    |
| <b>Color rendering index (Ra) &gt;:</b> | 80      |
| <b>SDCM:</b>                            | 3       |
| <b>Energy efficiency class:</b>         | F       |
| <b>Material of the body:</b>            | ABS     |
| <b>Diffuser material:</b>               | PMMA    |
| <b>Diffuser type:</b>                   | OPAL    |

## CHARACTERISTICS

TRIPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

# TRIPACT LED P 2300LM PMMA II KL. IP40/ IP20 595X595 830 (24W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


|  |            |                                   |   |
|--|------------|-----------------------------------|---|
| <b>Index:</b>                            | 658006     | <b>Dimensions (H/W/T/S) [mm]:</b> | 595/595/93  |
| <b>Light source:</b>                     | LED module | <b>Mounting dimensions [mm]:</b>  | 595/595   |
| <b>Nominal power [W]:</b>                | 24         | <b>Ingress protection:</b>        | IP40/20   |
| <b>Rated power of the luminaire [W]:</b> | 25         | <b>Mounting version:</b>          | recessed  |
| <b>Supply voltage [V]:</b>               | 220-240    | <b>Working temperature [°C]:</b>  | from -25 to +35   |
| <b>Frequency [Hz]:</b>                   | 50 - 60    | <b>Net weight [kg]:</b>           | 1.800   |
| <b>Luminous flux [lm]:</b>               | 2300       | <b>EAN:</b>                       | 5905963658006   |
| <b>Luminous efficacy [lm/W]:</b>         | 92         | <b>Category type:</b>             | troffers  |
| <b>Energy efficiency class:</b>          | F          | <b>AC voltage range [V]:</b>      | 198 - 264   |
| <b>Electrical protection class:</b>      | II         | <b>DC voltage range [V]:</b>      | 176 - 276   |
| <b>Colour temperature [K]:</b>           | 3000       | <b>LED lifespan L80B10 [h]:</b>   | 84000   |
| <b>Color rendering index (Ra) &gt;:</b>  | 80         | <b>LED lifespan L90B10 [h]:</b>   | 42000   |
| <b>SDCM:</b>                             | 3          | <b>Light distribution type:</b>   | lambertian  |
| <b>Power factor:</b>                     | 0.95       | <b>Photobiological safety:</b>    | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| <b>LED lifespan L70B50 [h]:</b>          | 132000     | <b>Warranty [years]:</b>          | 5   |
| <b>Diffuser material:</b>                | PMMA       | <b>Warranty [years]:</b>          | 5   |
| <b>Diffuser type:</b>                    | OPAL       | <b>Manual:</b>                    | <a href="#">Download PDF</a>  |
| <b>Diffuser colour:</b>                  | white      | <b>CE certificate:</b>            | <a href="#">251/2023</a>  |
| <b>Material of the body:</b>             | ABS        | <b>Pliik LDT:</b>                 | <a href="#">Download</a>  |
| <b>Colour of the body:</b>               | white      |                                   |   |

# TRIPACT LED P 2300LM PMMA II KL. IP40/ IP20 595X595 830 (24W)


DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name                           |
|--------|--------------------------------|
| 658372 | Diffuser TRIPACT               |
| 374845 | Frame adapter KG 635x635 WHITE |



Diffuser TRIPACT (658372)



Frame adapter KG 635x635  
WHITE (374845)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 251/2023