


TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20

595X595 840 (24W)

DETAILED CARD

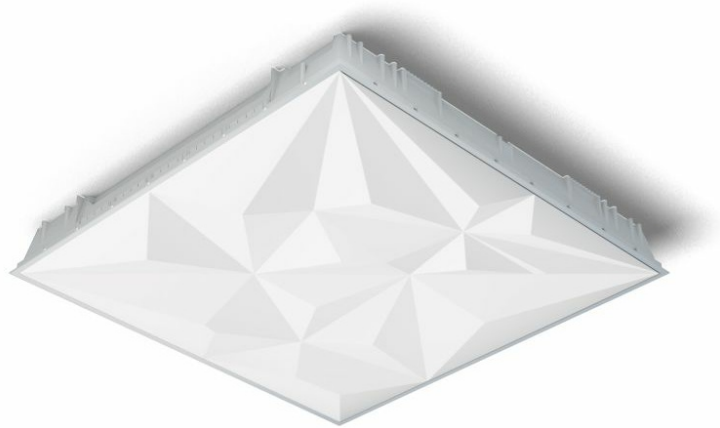

TECHNICAL PARAMETERS

| | |
|---------------------------------|---------|
| Index: | 658174 |
| Ingress protection: | IP40/20 |
| Nominal power [W]: | 24 |
| Luminous flux [lm]*: | 2500 |
| Colour rendering index: | >80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | E |
| Material of the body: | ABS |
| Diffuser material: | PMMA |
| Diffuser type: | OPAL |

CHARACTERISTICS

TRIPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20


595X595 840 (24W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|------------|----------------------------|---|
| Index: | 658174 | Colour of the body: | white |
| Colour temperature [K]: | 4000 | Dimensions (H/W/T/S) [mm]: | 595/595/93 |
| Light source: | LED module | Mounting dimensions [mm]: | 595/595 |
| Luminous flux [lm]: | 2500 | Ingress protection: | IP40/20 |
| Nominal power [W]: | 24 | Mounting version: | recessed |
| Diffuser type: | OPAL | Working temperature [°C]: | from -25 to +35 |
| Rated power of the luminaire [W]: | 25 | Net weight [kg]: | 1.900 |
| DIMM DALI: | yes | EAN: | 5905963658174 |
| Supply voltage [V]: | 220-240 | Category type: | louvres |
| Energy efficiency class: | E | AC voltage range [V]: | 198 - 264 |
| Frequency [Hz]: | 50 - 60 | DC voltage range [V]: | 176 - 276 |
| Luminous efficacy [lm/W]: | 100 | LED lifespan L80B20 [h]: | 84000 |
| Electrical protection class: | I | LED lifespan L90B10 [h]: | 42000 |
| Colour rendering index: | >80 | Light distribution type: | lambertian |
| SDCM: | ≤ 3 | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Power factor: | 0.95 | Warranty [years]: | 5 |
| LED lifespan L70B50 [h]: | 132000 | Warranty [years]: | 5 |
| Diffuser material: | PMMA | Manual: | Download PDF |
| Diffuser colour: | white | CE certificate: | 251/2023 |
| Material of the body: | ABS | Pliik LDT: | Download |

LIGHT CURVES

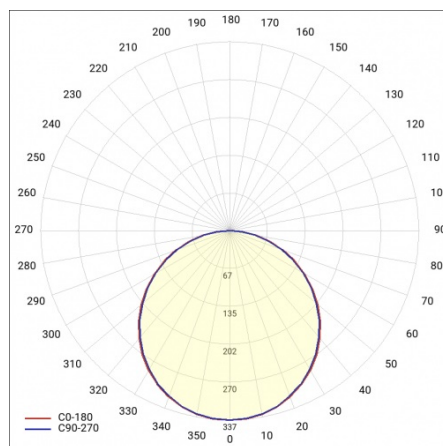


TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20

595X595 840 (24W)


DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|--------|--|
| 658372 | Diffuser TRIPACT |
| 999543 | Plasterboard recessing kit 630x630 white (steel version) |



Diffuser TRIPACT (658372)



Plasterboard recessing kit 630x630 white (steel version) (999543)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 251/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl