


# TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20

## 595X595 840 (24W)

DETAILED CARD

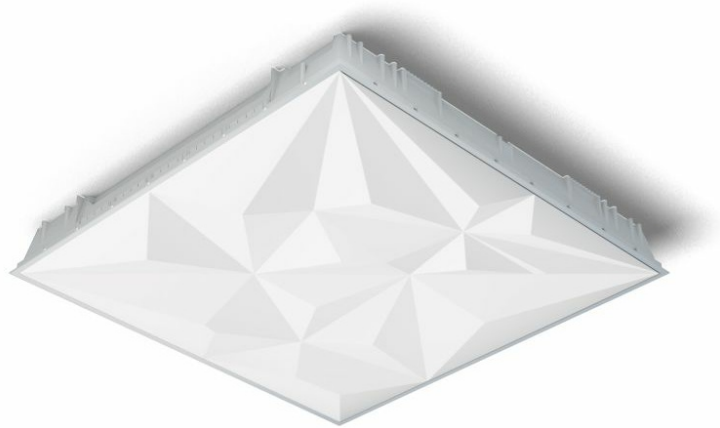

### TECHNICAL PARAMETERS

<b>Index:</b>	658174
<b>Ingress protection:</b>	IP40/20
<b>Nominal power [W]:</b>	24
<b>Luminous flux [lm]*:</b>	2500
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PMMA
<b>Diffuser type:</b>	OPAL

### CHARACTERISTICS

TRIPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

### APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

# TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20


## 595X595 840 (24W)

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	658174	Colour of the body:	white
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	595/595/93
Light source:	LED module	Mounting dimensions [mm]:	595/595
Luminous flux [lm]:	2500	Ingress protection:	IP40/20
Nominal power [W]:	24	Mounting version:	recessed
Diffuser type:	OPAL	Working temperature [°C]:	from -25 to +35
Rated power of the luminaire [W]:	25	Net weight [kg]:	1.900
DIMM DALI:	yes	EAN:	5905963658174
Supply voltage [V]:	220-240	Category type:	louvres
Energy efficiency class:	E	AC voltage range [V]:	198 - 264
Frequency [Hz]:	50 - 60	DC voltage range [V]:	176 - 276
Luminous efficacy [lm/W]:	100	LED lifespan L80B20 [h]:	84000
Electrical protection class:	I	LED lifespan L90B10 [h]:	42000
Colour rendering index:	>80	Light distribution type:	lambertian
SDCM:	≤ 3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	Warranty [years]:	5
LED lifespan L70B50 [h]:	132000	Warranty [years]:	5
Diffuser material:	PMMA	Manual:	<a href="#">Download PDF</a>
Diffuser colour:	white	CE certificate:	<a href="#">251/2023</a>
Material of the body:	ABS	Pliik LDT:	<a href="#">Download</a>

### LIGHT CURVES

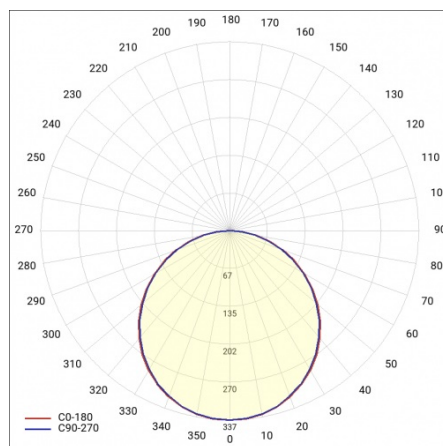

# TRIPACT LED P 2500LM PMMA DALI I KL. IP40/ IP20

## 595X595 840 (24W)


DETAILED CARD

### ACCESSORIES AVAILABLE

index	Name
658372	Diffuser TRIPACT
999543	Plasterboard recessing kit 630x630 white (steel version)



Diffuser TRIPACT (658372)



Plasterboard recessing kit 630x630 white (steel version) (999543)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 251/2023