


# TRIPACT LED P 4050LM PMMA II KL. IP40/ IP20 595X595 840 (42W)

DETAILED CARD

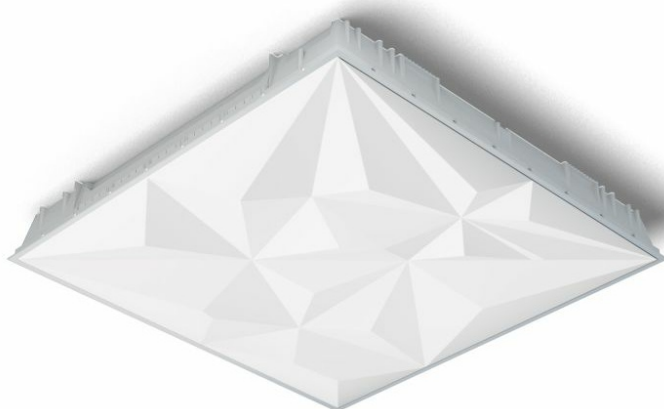

## TECHNICAL PARAMETERS

Index:	658037
Ingress protection:	IP40/20
Nominal power [W]:	42
Luminous flux [lm]*:	4050
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	ABS
Diffuser material:	PMMA
Diffuser type:	OPAL

## CHARACTERISTICS

TRIPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

# TRIPACT LED P 4050LM PMMA II KL. IP40/ IP20 595X595 840 (42W)

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE


Index:	658037	Colour of the body:	white
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	595/595/93
Light source:	LED module	Mounting dimensions [mm]:	595/595
Luminous flux [lm]:	4050	Ingress protection:	IP40/20
Nominal power [W]:	42	Mounting version:	recessed
Diffuser type:	OPAL	Working temperature [°C]:	from -25 to +35
Rated power of the luminaire [W]:	43	Net weight [kg]:	1.800
Supply voltage [V]:	220-240	EAN:	5905963658037
Energy efficiency class:	E	Category type:	louvres
Frequency [Hz]:	50 - 60	AC voltage range [V]:	198 - 264
Luminous efficacy [lm/W]:	94	DC voltage range [V]:	176 - 276
Electrical protection class:	II	LED lifespan L80B20 [h]:	84000
Colour rendering index:	>80	LED lifespan L90B10 [h]:	42000
SDCM:	≤ 3	Light distribution type:	lambertian
Power factor:	0.95	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
LED lifespan L70B50 [h]:	132000	Warranty [years]:	5
Diffuser material:	PMMA	Warranty [years]:	5
Diffuser colour:	white	Manual:	<a href="#">Download PDF</a>
Material of the body:	ABS	CE certificate:	<a href="#">251/2023</a>
		Pliik LDT:	<a href="#">Download</a>

# TRIPACT LED P 4050LM PMMA II KL. IP40/ IP20 595X595 840 (42W)


DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
658372	Diffuser TRIPACT
999543	Plasterboard recessing kit 630x630 white (steel version)



Diffuser TRIPACT (658372)



Plasterboard recessing kit 630x630 white (steel version) (999543)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 251/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl