


# CORPACT LED P 2300LM PMMA DALI I KL. IP40/20

## 595X595MM 830 (24W)

DETAILED CARD

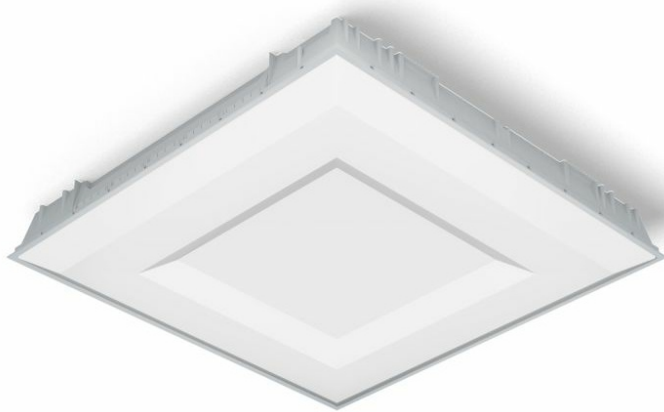

### TECHNICAL PARAMETERS

Index:	658655
Ingress protection:	IP40/20
Nominal power [W]:	24
Luminous flux [lm]*:	2300
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	ABS
Diffuser material:	PMMA
Diffuser type:	OPAL

### CHARACTERISTICS

CORPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

### APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

# CORPACT LED P 2300LM PMMA DALI I KL. IP40/20

## 595X595MM 830 (24W)

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	658655	Dimensions (H/W/T/S) [mm]:	595/595/93
Light source:	LED module	Mounting dimensions [mm]:	595/595
Nominal power [W]:	24	Ingress protection:	IP40/20
Rated power of the luminaire [W]:	25	Mounting version:	recessed
Supply voltage [V]:	220-240	Working temperature [°C]:	from -25 to +35
Frequency [Hz]:	50 - 60	DIMM 1-10V:	yes
Luminous flux [lm]:	2300	DIMM DALI:	yes
Energy efficiency class:	F	Net weight [kg]:	1.900
Electrical protection class:	I	Warranty [years]:	5
Colour temperature [K]:	3000	EAN:	5905963658655
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	AC voltage range [V]:	198 - 264
Power factor:	0.95	DC voltage range [V]:	176 - 276
LED lifespan L70B50 [h]:	132000	UGR (4H8H):	17-23
Diffuser material:	PMMA	Light distribution type:	lambertian
Diffuser type:	OPAL	CE certificate:	<a href="#">250/2023</a>
Diffuser colour:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	ABS	Luminous efficacy [lm/W]:	92
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>


# CORPACT LED P 2300LM PMMA DALI I KL. IP40/20

## 595X595MM 830 (24W)

DETAILED CARD

### ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white



Plasterboard recessing kit 630x630  
white (999543)

Card creation date: 08 April 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 250/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl