


CORPACT LED P 3750LM PMMA DALI I KL. IP40/20 595X595MM 830 (42W)

DETAILED CARD

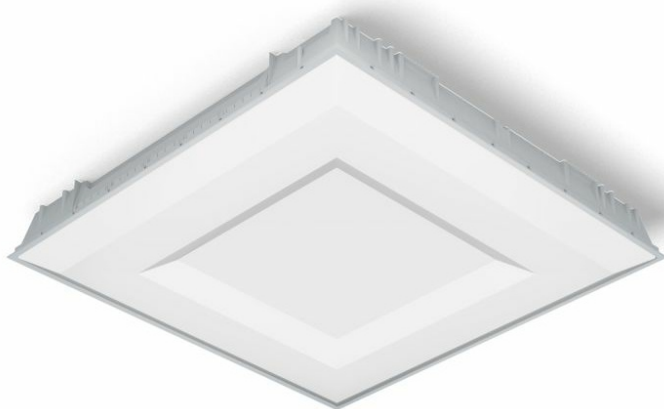

TECHNICAL PARAMETERS

| | |
|---------------------------------|---------|
| Index: | 658679 |
| Ingress protection: | IP40/20 |
| Nominal power [W]: | 42 |
| Luminous flux [lm]*: | 3750 |
| Colour rendering index: | >80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | F |
| Material of the body: | ABS |
| Diffuser material: | PMMA |
| Diffuser type: | OPAL |

CHARACTERISTICS

CORPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

CORPACT LED P 3750LM PMMA DALI I KL. IP40/20

595X595MM 830 (42W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|------------|----------------------------|---|
| Nominal power [W]: | 42 | Dimensions (H/W/T/S) [mm]: | 595/595/93 |
| Index: | 658679 | Mounting dimensions [mm]: | 595/595 |
| Colour temperature [K]: | 3000 | Ingress protection: | IP40/20 |
| Light source: | LED module | Mounting version: | recessed |
| Luminous flux [lm]: | 3750 | Working temperature [°C]: | from -25 to +35 |
| Diffuser type: | OPAL | DIMM 1-10V: | yes |
| Rated power of the luminaire [W]: | 43 | Net weight [kg]: | 1.900 |
| DIMM DALI: | yes | Warranty [years]: | 5 |
| Supply voltage [V]: | 220-240 | EAN: | 5905963658679 |
| Energy efficiency class: | F | Category type: | louvres |
| Frequency [Hz]: | 50 - 60 | AC voltage range [V]: | 198 - 264 |
| Electrical protection class: | I | DC voltage range [V]: | 176 - 276 |
| Colour rendering index: | >80 | UGR (4H8H): | 17-23 |
| SDCM: | ≤ 3 | Light distribution type: | lambertian |
| Power factor: | 0.95 | CE certificate: | 250/2023 |
| LED lifespan L70B50 [h]: | 132000 | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Diffuser material: | PMMA | Luminous efficacy [lm/W]: | 87 |
| Diffuser colour: | white | Manual: | Download PDF |
| Material of the body: | ABS | Pliik LDT: | |
| Colour of the body: | white | | |

CORPACT LED P 3750LM PMMA DALI I KL. IP40/20 595X595MM 830 (42W)

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|--------|--|
| 999543 | Plasterboard recessing kit 630x630 white (steel version) |



Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 250/2023