

MADERA ALTUS LED EVO 900X900MM 4650LM PLX II IP41 GREY 830 (50W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	703843
Ingress protection:	IP41
Nominal power [W]:	50
Luminous flux [lm]*:	4650
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Colour of the body:	grey
Dimensions (H/W/T/S) [mm]:	900/900/120

CHARACTERISTICS

Suspended, square LED fitting with very high luminous flux, made of steel sheet, powder-coated grey, white, black. equipped with energy-saving light source LED-GO!. Opal PMMA diffuser ensures even light distribution and no glare effect.

APPLICATION

Suspended luminaire intended for indoor use in offices or common rooms. Suitable as a general light source in representative rooms.


MADERA ALTUS LED EVO 900X900MM 4650LM PLX II IP41 GREY 830 (50W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	703843	Ingress protection:	IP41
Nominal power [W]:	50	Net weight [kg]:	20
Colour temperature [K]:	3000	Category type:	louvres
Luminous flux [lm]:	4650	Luminaire rated power O_{min} [W]:	50
Colour of the body:	grey	ETIM class:	EC002892
Energy efficiency class:	F	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Electrical protection class:	II	CE certificate:	225/2023
Colour rendering index:	>80	Warranty [years]:	2
SDCM:	≤ 3	Manual:	Download PDF
Dimensions (H/W/T/S) [mm]:	900/900/120	Plik LDT:	Download

LIGHT CURVES

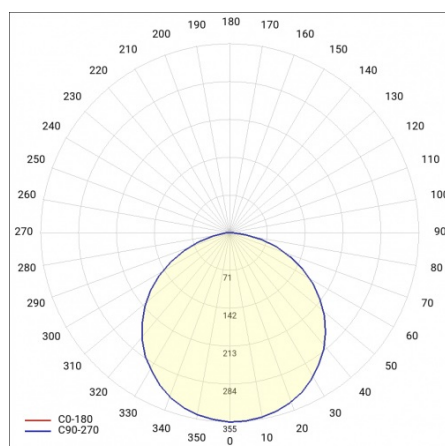

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 225/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl