
# BARIS 40 LED Z RCR 3775LM PLX I CL. IP44 1190MM 940 25W ANODE CO

DETAILED CARD

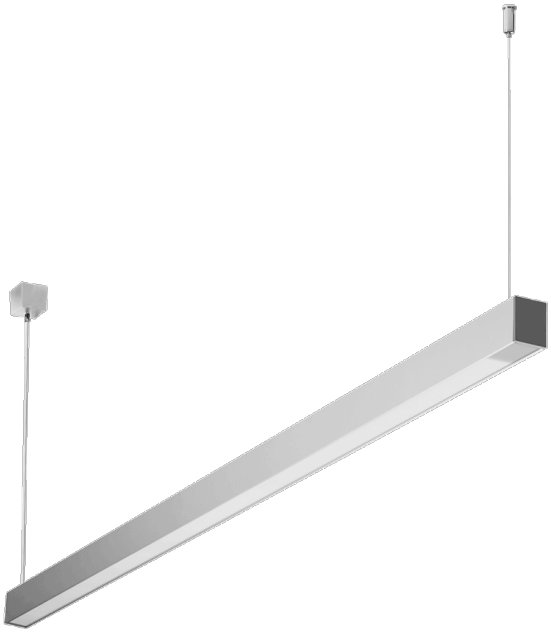

## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 331060 |
| **Ingress protection:** | IP44 |
| **Impact resistance:** | IK06 |
| **Rated power of the luminaire [W]*:** | 25 |
| **Luminous flux [lm]*:** | 3775 |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 90 |
| **SDCM:** | 3 |
| **Energy efficiency class:** | D |
| **Colour of the body:** | C0 anode |

## CHARACTERISTICS

The BARIS 40 LED RCR is a slim luminaire with a very narrow cross-section, designed for surface-mounted or suspended installation. The body, made from an aluminium profile, is available in a grey anodised finish or painted white or black. Other colours are available on request. A choice of opal or prismatic diffusers is available. The RCR motion sensor with the Corridor Standard function automatically controls the luminaire's operation. Upon detecting movement, it activates full lighting, taking into account the set ambient light level threshold. Once movement ceases, the luminaire maintains 100% output for a preset duration and then, depending on the settings, switches to a standby level of 10% or 30%. Adjustable settings include the detection area, daylight threshold, and hold and standby times. Reducing brightness during periods of inactivity helps to minimise energy consumption.
The suspension system facilitates installation and adjustment of the suspension height. Suspended versions are supplied with 1.2 m suspension cables and a recessed housing included in the set.

## APPLICATION

The BARIS 40 LED RCR is designed for general interior lighting in areas with variable traffic levels. It is particularly suitable for corridors, passageways, stairwells and entrance areas. It is used in office blocks, hotels, residential buildings and public facilities, particularly in spaces used periodically.

# BARIS 40 LED Z RCR 3775LM PLX I CL. IP44 1190MM 940 25W ANODE CO


DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 331060 |
| **Light source:** | LED |
| **Rated power of the luminaire [W]:** | 25 |
| **Supply voltage [V]:** | 220-240 |
| **Frequency [Hz]:** | 50-60 |
| **Luminous flux [lm]:** | 3775 |
| **Luminous efficacy [lm/W]:** | 151 |
| **Energy efficiency class:** | D |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 90 |
| **SDCM:** | 3 |
| **LED lifespan L70B50 [h]:** | 150000 |
| **LED lifespan L80B10 [h]:** | 100000 |
| **LED lifespan L90B10 [h]:** | 50000 |
| **Diffuser material:** | PC |

| | |
|---|---|
| **Diffuser type:** | OPAL |
| **Colour of the body:** | C0 anode |
| **Dimensions (H/W/T/S) [mm]:** | 53/40/1190 |
| **Impact resistance:** | IK06 |
| **Ingress protection:** | IP44 |
| **Mounting version:** | suspended |
| **Working temperature [°C]:** | from 0 to +35 |
| **Motion sensor:** | yes |
| **Net weight [kg]:** | 1.580 |
| **Category type:** | luminaires and linear systems |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 190/2026 |
| **Environmental Product Declaration (EPD):** | 852/2025 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |

## LIGHT CURVES

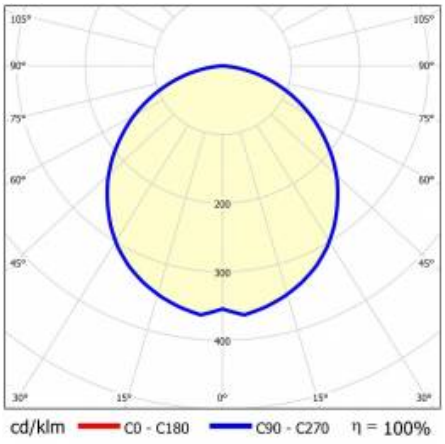


Card creation date: 04 November 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 190/2026

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl