


# LINEA LED EVO 1404MM 8700LM DALI LS2 840 BUTTERFLY (60W)

## DETAILED CARD

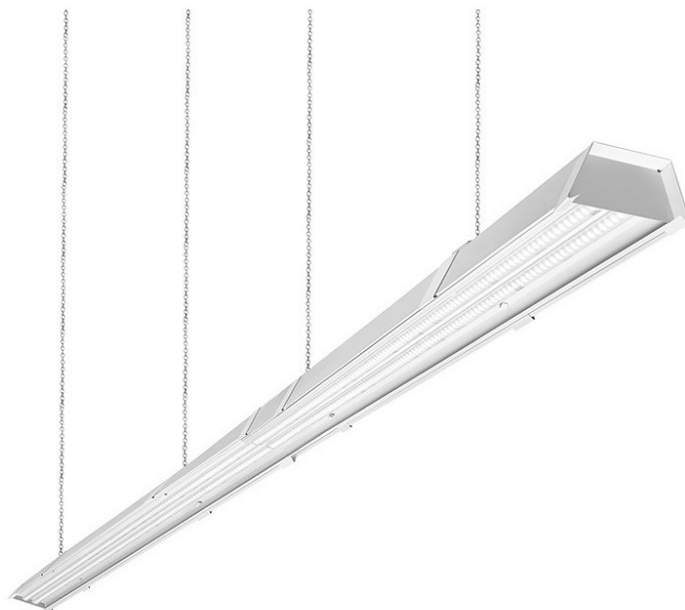

### TECHNICAL PARAMETERS

Index:	151200
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	60
Luminous flux [lm]*:	8700
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	C
Material of the body:	powder coated steel
Colour of the body:	white

### CHARACTERISTICS

System of suspended industrial lighting line with integrated energy-saving LED light source. Through-wiring and line connector enable quick assembly of the fitting. Equipped with an unique panel mounting systems facilitating the easy assembly of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

### APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.


# LINEA LED EVO 1404MM 8700LM DALI LS2 840 BUTTERFLY (60W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	1110
Nominal power [W]:	60	Impact resistance:	IK07
Rated power of the luminaire [W]:	62.80	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	surface, suspended
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	8700	DIMM DALI:	yes
Luminous efficacy [lm/W]:	139	Through wiring:	LS2
Energy efficiency class:	C	Net weight [kg]:	3.700
Electrical protection class:	I	CE certificate:	<a href="#">22/2017</a>
Colour temperature [K]:	4000	Index:	151200
Colour rendering index:	>80	EAN:	5,90596E+12
SDCM:	≤ 3	Category type:	systems
Power factor:	0.98	Light distribution type:	butterfly
Beam angle [°]:	butterfly	ETIM class:	EC000282
Diffuser material:	PMMA	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	milky	Warranty [years]:	5
Optics material:	PMMA	LED lifespan L70B50 [h]:	116000
Optics:	lens	LED lifespan L90B10 [h]:	35000
Material of the body:	powder coated steel	LED lifespan L80B20 [h]:	72000
Colour of the body:	white	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	1404/115/64	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

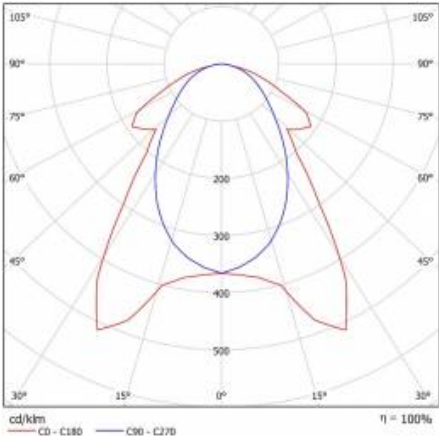

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 22/2017



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)