


LINEA LED EVO 1404MM 8800LM LS2 840 ASYMETRYCZNY (60W)

DETAILED CARD

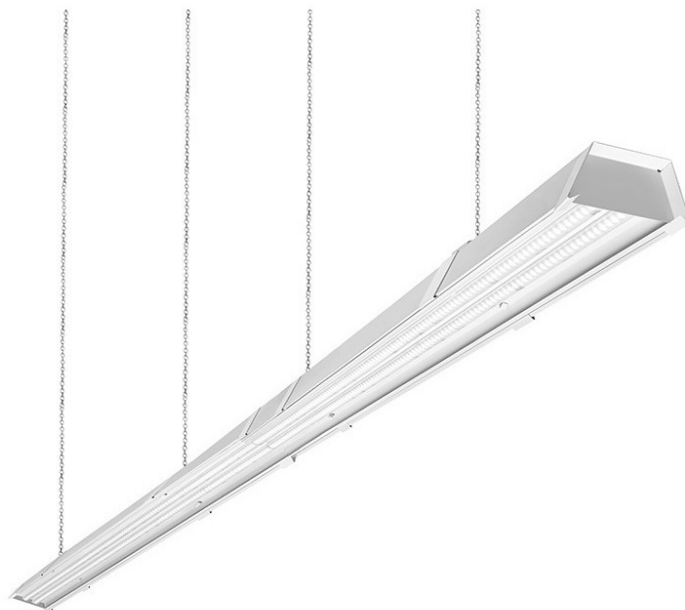

TECHNICAL PARAMETERS

Index:	151170
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	60
Luminous flux [lm]*:	8800
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	C
Material of the body:	powder coated steel
Colour of the body:	white

CHARACTERISTICS

System of suspended industrial lighting line with integrated energy-saving LED light source. Through-wiring and line connector enable quick assembly of the fitting. Equipped with an unique panel mounting systems facilitating the easy assembly of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.


LINEA LED EVO 1404MM 8800LM LS2 840 ASYMETRYCZNY (60W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	1110
Nominal power [W]:	60	Impact resistance:	IK07
Rated power of the luminaire [W]:	62.80	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	surface, suspended
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Luminous flux [lm]:	8800	Through wiring:	LS2
Luminous efficacy [lm/W]:	140	Net weight [kg]:	3.600
Energy efficiency class:	C	CE certificate:	22/2017
Electrical protection class:	I	Index:	151170
Colour temperature [K]:	4000	EAN:	5,90596E+12
Colour rendering index:	>80	Category type:	systems
SDCM:	≤ 3	Light distribution type:	asymmetric
Power factor:	0.98	ETIM class:	EC000282
Beam angle [°]:	Asymmetric	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PMMA	Warranty [years]:	5
Diffuser type:	milky	LED lifespan L70B50 [h]:	116000
Optics material:	PMMA	LED lifespan L90B10 [h]:	35000
Optics:	lens	LED lifespan L80B20 [h]:	72000
Material of the body:	powder coated steel	Warranty [years]:	5
Colour of the body:	white	Manual:	Download PDF
Dimensions (H/W/T/S) [mm]:	1404/115/64		

LIGHT CURVES

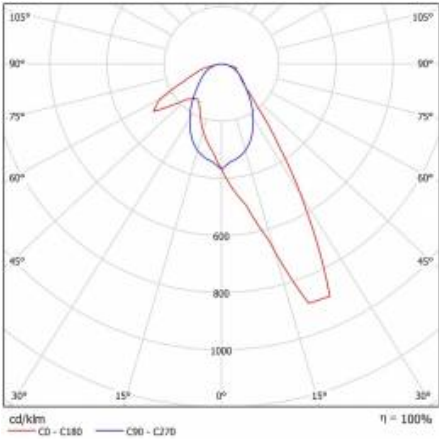

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 22/2017



LENA
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl