


LINEA LED EVO 1404MM 9350LM LS2 840 45ST (60W)

DETAILED CARD

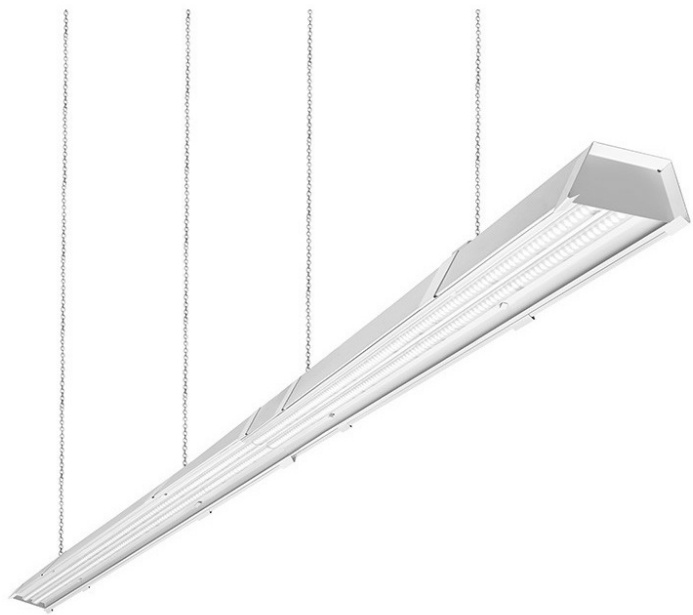

TECHNICAL PARAMETERS

| | |
|--------------------------|---------------------|
| Index: | 151064 |
| Ingress protection: | IP20 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 60 |
| Luminous flux [lm]*: | 9350 |
| Colour temperature [K]: | 4000 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | C |
| Material of the body: | powder coated steel |
| Colour of the body: | white |

CHARACTERISTICS

System of suspended industrial lighting line with integrated energy-saving LED light source. Through-wiring and line connector enable quick assembly of the fitting. Equipped with an unique panel mounting systems facilitating the easy assembly of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.

DETAILED CARD

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

