


LINEA LED EVO 1404MM 9650LM DALI LS2 840 90ST (60W)

DETAILED CARD

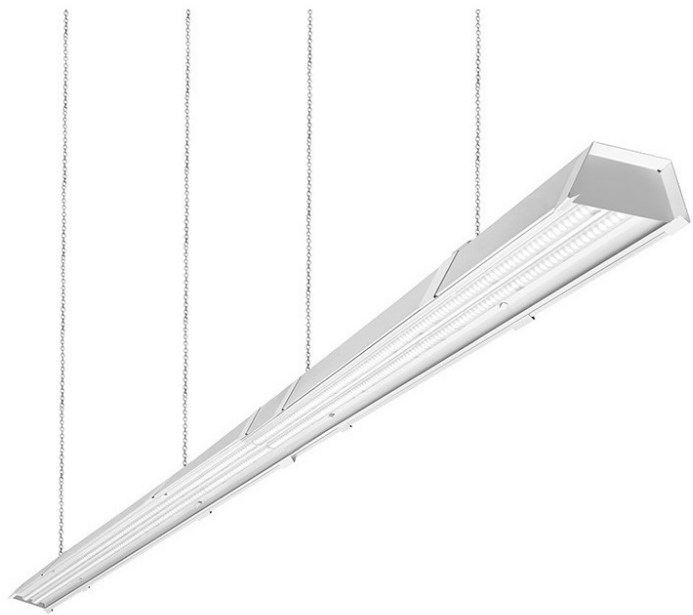

TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	22
Luminous flux [lm]*:	3000 - 13500
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	C; D
Material of the body:	blacha stalowa malowana proszkowo
Colour of the body:	biały

CHARACTERISTICS

System of suspended industrial lighting line with integrated energy-saving LED light source. Through-wiring and line connector enable quick assembly of the fitting. Equipped with an unique panel mounting systems facilitating the easy assembly of the product. Available with various types of optic: 90°, 60° 45° 20°, asymmetric and butterfly.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.


LINEA LED EVO 1404MM 9650LM DALI LS2 840 90ST (60W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	moduł LED	Impact resistance:	IK07
Nominal power [W]:	22	Ingress protection:	IP20
Rated power of the luminaire [W]:	23.20; 31.90; 62.80; 93.80	Mounting version:	natynkowy, zwieszany
Supply voltage [V]:	220-240	Working temperature [°C]:	od -20 do +35; od -25 do +35
Frequency [Hz]:	50-60	DIMM DALI:	yes
Luminous flux [lm]:	3000 - 13500	Through wiring:	LS2
Energy efficiency class:	C; D	Net weight [kg]:	3.400; 3.500; 3.600; 3.700; 7.920
Electrical protection class:	I	CE certificate:	22/2017; 22/2017
Colour temperature [K]:	4000	Index:	x
Colour rendering index:	>80	EAN:	x
SDCM:	≤ 3	Category type:	systems
Power factor:	0.95; 0.98	Light distribution type:	asymetryczny; butterfly
Beam angle [°]:	max butterfly	ETIM class:	EC000282
Diffuser material:	PMMA	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Diffuser type:	mleczny	Warranty [years]:	do 5 lat (pod warunkiem rejestracji na stronie lenalighting.pl)
Optics material:	PMMA	LED lifespan L70B50 [h]:	116000
Optics:	soczewka liniowa	LED lifespan L90B10 [h]:	35000
Material of the body:	blacha stalowa malowana proszkowo	LED lifespan L80B20 [h]:	72000
Colour of the body:	biały	Warranty [years]:	5
Dimensions (H/W/T/S) [mm]:	1404/115/64; 3360/115/64	Manual:	Download PDF
Mounting dimensions [mm]:	1110; 1390		

LIGHT CURVES

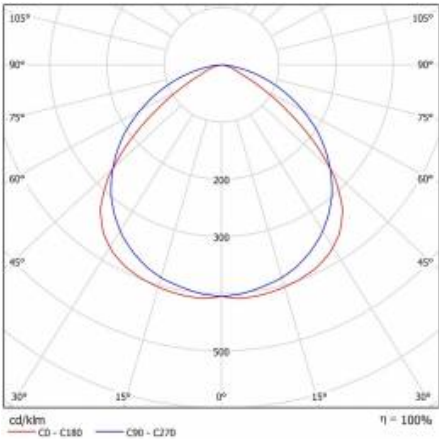

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 22/2017

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl