

# CAPELLA LED PLUS EDGE BOX 1020LM 840 IP54 AW 3H BIAŁY (11W) 320MM

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	949203
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK06
<b>Nominal power [W]:</b>	11
<b>Luminous flux [lm]*:</b>	1020
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- with a radio motion sensor,
- with a PIR presence detector,
- with DALI control,
- with CORRIDOR function (DALI + RCR),
- with Master / Slave RCR motion sensor (wireless),
- with emergency module,
- with very high ingress protection IP65,
- with ANTIVANDAL protection.

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

# CAPELLA LED PLUS EDGE BOX 1020LM 840 IP54 AW 3H BIAŁY (11W) 320MM

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	11	Diffuser type:	OPAL
Light source:	LED module	Diffuser colour:	white
Colour temperature [K]:	4000	Optics material:	PMMA
Luminous flux [lm]:	1020	Optics:	lens
Rated power of the luminaire [W]:	11.90	Material of the body:	ABS
Supply voltage [V]:	220-240	Colour of the body:	white
Frequency [Hz]:	50 - 60	Dimensions (H/W/T/S) [mm]:	320/105
EDGE/BOX Colour:	white	Mounting dimensions [mm]:	158
Luminous efficacy [lm/W]:	86	Impact resistance:	IK06
Energy efficiency class:	F	Ingress protection:	IP54
Electrical protection class:	II	Mounting version:	surface
Colour rendering index:	>80	Working temperature [°C]:	from -10 to +35
SDCM:	≤ 3	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
Emergency lighting [h]:	3	Dimensions of single box [mm]:	342/342/122
Power factor:	0.92	Net weight [kg]:	1.500
LED lifespan L70B50 [h]:	122000	Warranty [years]:	2 / 0.5 (bateria)
Beam angle [°]:	120	CE certificate:	<a href="#">373/2023</a>
Battery:	NiMh	Index:	949203
Battery capacity [mAh]:	1500	EAN:	5905963949203
Surge protection [kV]:	1	Category type:	bulkheads
Diffuser material:	PC	Version:	EDGE BOX
		Product line:	plus
		AC voltage range [V]:	220 - 240
		UGR (4H8H):	16,1-24,2
		Light distribution type:	lambertian
		Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
		Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
		Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

# CAPELLA LED PLUS EDGE BOX 1020LM 840 IP54 AW 3H BIAŁY (11W) 320MM

## DETAILED CARD

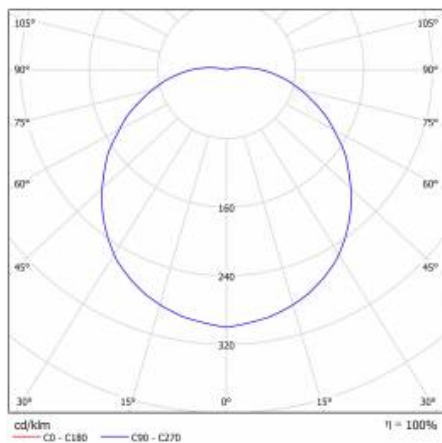

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 373/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl