

# CAPELLA LED PLUS EDGE BOX 320MM 1500LM IP54 840 (15W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	949135
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK06
<b>Nominal power [W]:</b>	15
<b>Luminous flux [lm]*:</b>	1500
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- with a radio motion sensor,
- with a PIR presence detector,
- with DALI control,
- with CORRIDOR function (DALI + RCR),
- with Master / Slave RCR motion sensor (wireless),
- with emergency module,
- with very high ingress protection IP65,
- with ANTIVANDAL protection.

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

# CAPELLA LED PLUS EDGE BOX 320MM 1500LM IP54 840 (15W)

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

<b>Nominal power [W]:</b>	15	<b>Diffuser type:</b>	OPAL
<b>Light source:</b>	LED module	<b>Diffuser colour:</b>	white
<b>Colour temperature [K]:</b>	4000	<b>Optics material:</b>	PMMA
<b>Luminous flux [lm]:</b>	1500	<b>Optics:</b>	lens
<b>Rated power of the luminaire [W]:</b>	16	<b>Material of the body:</b>	ABS
<b>Supply voltage [V]:</b>	220-240	<b>Colour of the body:</b>	white
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting dimensions [mm]:</b>	158
<b>EDGE/BOX Colour:</b>	white	<b>Impact resistance:</b>	IK06
<b>Version:</b>	EDGE BOX	<b>Ingress protection:</b>	IP54
<b>Luminous efficacy [lm/W]:</b>	94	<b>Mounting version:</b>	surface
<b>Energy efficiency class:</b>	E	<b>Working temperature [°C]:</b>	from -10 to +35
<b>Electrical protection class:</b>	II	<b>Accessories included:</b>	gland, extraction, 2x cover cable, screws, wall plugs 6mm
<b>Colour rendering index:</b>	>80	<b>Dimensions of single box [mm]:</b>	342/342/122
<b>SDCM:</b>	≤ 3	<b>Net weight [kg]:</b>	0.850
<b>Power factor:</b>	0.94	<b>Warranty [years]:</b>	5
<b>Dimensions (H/W/T/S) [mm]:</b>	320/105	<b>CE certificate:</b>	<a href="#">373/2023</a>
<b>LED lifespan L70B50 [h]:</b>	115000	<b>Index:</b>	949135
<b>Beam angle [°]:</b>	120	<b>EAN:</b>	5905963949135
<b>Surge protection [kV]:</b>	1	<b>Category type:</b>	bulkheads
<b>Diffuser material:</b>	PC	<b>Product line:</b>	plus
		<b>AC voltage range [V]:</b>	220 - 240
		<b>UGR (4H8H):</b>	17,5-25,2
		<b>Light distribution type:</b>	lambertian
		<b>Dimensions of bulk box (H/W/D) [mm]:</b>	794/1194/982
		<b>ETIM class:</b>	EC002892
		<b>Photobiological safety:</b>	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
		<b>Manual:</b>	<a href="#">Download PDF</a>
		<b>Pliik LDT:</b>	<a href="#">Download</a>

## LIGHT CURVES

# CAPELLA LED PLUS EDGE BOX 320MM 1500LM IP54 840 (15W)

## DETAILED CARD

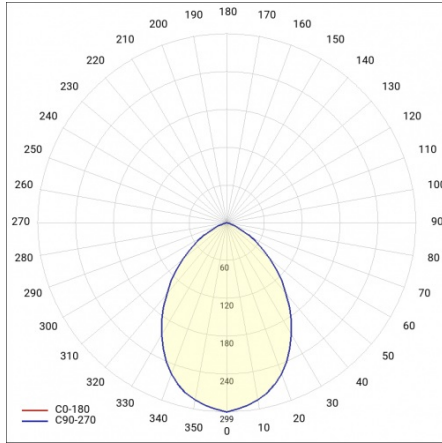

Card creation date: 17 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 373/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl