

# CAPELLA LED PLUS EDGE BOX RING 1500LM 840 IP54 AW 3H BIAŁY (15W) 340MM

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	949364
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	15
<b>Luminous flux [lm]*:</b>	1500
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Ring material:</b>	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- with a radio motion sensor,
- with a PIR presence detector,
- with DALI control,
- with CORRIDOR function (DALI + RCR),
- with Master / Slave RCR motion sensor (wireless),
- with emergency module,
- with very high ingress protection IP65,
- with ANTIVANDAL protection.

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

# CAPELLA LED PLUS EDGE BOX RING 1500LM 840 IP54 AW 3H BIAŁY (15W) 340MM

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	15	Diffuser colour:	white
Light source:	LED module	Optics material:	PMMA
Colour temperature [K]:	4000	Optics:	lens
Luminous flux [lm]:	1500	Material of the body:	ABS
Rated power of the luminaire [W]:	16	Colour of the body:	white
Supply voltage [V]:	220-240	Ring material:	ABS
Frequency [Hz]:	50 - 60	Dimensions (H/W/T/S) [mm]:	340/105
EDGE/BOX Colour:	white	Mounting dimensions [mm]:	158
Ring colour:	white	Impact resistance:	IK07
Luminous efficacy [lm/W]:	94	Ingress protection:	IP54
Energy efficiency class:	E	Mounting version:	surface
Electrical protection class:	II	Working temperature [°C]:	from -10 to +35
Colour rendering index:	>80	Accessories included:	gland, extraction, 2x cover cable, screws, wall plugs 6mm
SDCM:	≤ 3	Dimensions of single box [mm]:	342/342/122
Emergency lighting [h]:	3	Net weight [kg]:	1.320
Power factor:	0.94	Warranty [years]:	2 / 0.5 (bateria)
LED lifespan L70B50 [h]:	115000	CE certificate:	<a href="#">373/2023</a>
Beam angle [°]:	120	Index:	949364
Battery:	NiMh	EAN:	5905963949364
Battery capacity [mAh]:	1500	Category type:	bulkheads
Surge protection [kV]:	1	Version:	EDGE BOX RING
Diffuser material:	PC	Product line:	plus
Diffuser type:	OPAL	AC voltage range [V]:	220 - 240
		UGR (4H8H):	17,5-25,2
		Light distribution type:	lambertian
		Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
		ETIM class:	EC000109
		Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
		Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

# CAPELLA LED PLUS EDGE BOX RING 1500LM 840 IP54 AW 3H BIAŁY (15W) 340MM

## DETAILED CARD

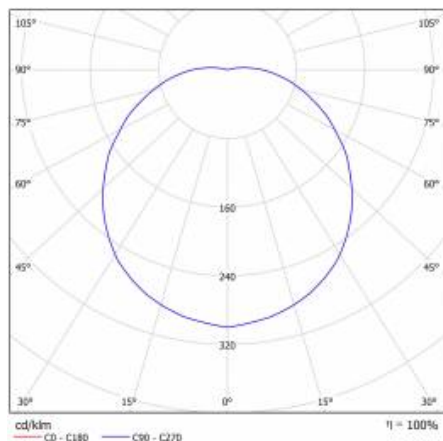

## TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date: 13 March 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 373/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl