

# DEIMOS LED PLUS 400MM 2850LM RCR I KL. IP40 830 WHITE (26W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	073854
<b>Ingress protection:</b>	IP40
<b>Nominal power [W]:</b>	26
<b>Luminous flux [lm]*:</b>	2850
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 4
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	HIPS
<b>Diffuser material:</b>	PMMA
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Surface mounted, round LED fitting with very high diffuser diameter, high luminous flux and even light distribution. Includes an integrated energy-saving light source LED GO!. HIPS base, powder coated white and black; light, white diffuser made using termoforming method. Simple pawl-based mounting system does not require any additional tools. The luminaire may be used to replace standard four-lamp fittings in irregular shaped rooms.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:

- radio motion sensor,
- corridor function,
- DALI,
- emergency module.

## APPLICATION

Surface mounted fitting intended for indoor use characterized by even light distribution and good surface lighting. Particularly suitable as a general light source in representative rooms and passageways. Thanks to exceptional lighting parameters, possible integration with the DALI system and decorative qualities, the product will surely prove its worth in large conference halls.


# DEIMOS LED PLUS 400MM 2850LM RCR I KL. IP40 830 WHITE (26W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Ingress protection:	IP40
Nominal power [W]:	26	Mounting version:	surface
Rated power of the luminaire [W]:	28	Working temperature [°C]:	from -20 to +35
Supply voltage [V]:	220-240	Motion sensor:	yes
Frequency [Hz]:	50 - 60	Accessories included:	mounting pins 4 pcs
Luminous flux [lm]:	2850	Dimensions of single box [mm]:	445/445/100
Luminous efficacy [lm/W]:	102	Net weight [kg]:	1.370
Energy efficiency class:	E	Gross weight [kg]:	1.720
Electrical protection class:	I	Warranty [years]:	5
Colour temperature [K]:	3000	CE certificate:	<a href="#">390/2023</a>
Colour rendering index:	>80	Index:	073854
SDCM:	≤ 4	EAN:	5905963073854
Power factor:	0.96	Category type:	bulkheads
Beam angle [°]:	131.6	Luminaire rated power $\Phi_{min}$ [W]:	29.30
Diffuser material:	PMMA	AC voltage range [V]:	195 - 264
Diffuser type:	OPAL	LED lifespan L70B50 [h]:	117000
Diffuser colour:	white	LED lifespan L80B20 [h]:	75000
Optics material:	PMMA	LED lifespan L90B10 [h]:	37000
Optics:	lens	Light distribution type:	open space
Material of the body:	HIPS	ETIM class:	EC002892
Colour of the body:	white	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Dimensions (H/W/T/S) [mm]:	∅400/100	Impact resistance:	IK02
Mounting dimensions [mm]:	306/306	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

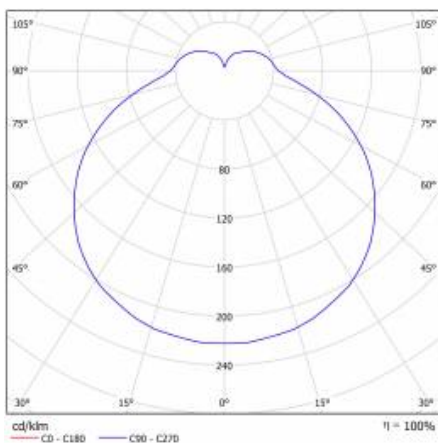

Card creation date: 10 June 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 390/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)