

# COMPACT LED EVO N 2750LM PLX II KL IP65 620X620 830 (24W)

DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK07
Nominal power [W]:	24
Luminous flux [lm]*:	2750
Colour rendering index:	80
SDCM:	≤ 3
Energy efficiency class:	A+
Material of the body:	ABS
Diffuser material:	PC
Diffuser type:	OPAL

## CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Special brackets for mounting COMPACT lamps in surface-mounted version for use on uneven ceilings. These holders ensure a solid fixing while maintaining the distance between the ceiling and the lamp.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.


# COMPACT LED EVO N 2750LM PLX II KL IP65 620X620 830 (24W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	628252	Mounting dimensions [mm]:	525/410
EAN:	5905963628252	Impact resistance:	IK07
Light source:	LED module	Ingress protection:	IP65
Nominal power [W]:	24	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +25
Frequency [Hz]:	50 - 60	Number on the palette [pcs]:	40
Luminous flux [lm]:	2750	Net weight [kg]:	3.400
Luminous efficacy [lm/W]:	110	Category type:	troffers
Energy efficiency class:	A+	AC voltage range [V]:	198 - 264
Electrical protection class:	II	UGR (4H8H):	< 19
Colour temperature [K]:	3000	LED lifespan L70B50 [h]:	132000
Colour rendering index:	80	LED lifespan L80B20 [h]:	84000
SDCM:	≤ 3	LED lifespan L90B10 [h]:	42000
Power factor:	0.90	ETIM class:	EC002892
Beam angle [°]:	120	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	OPAL	CE certificate:	<a href="#">357/2023</a>
Diffuser colour:	white	ENEC Certificate:	
Material of the body:	ABS	PZH certificate:	<a href="#">B-BK-60212-0070/20</a> <a href="#">B-BK-60212-0042/20</a>
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	66/620/620/0	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

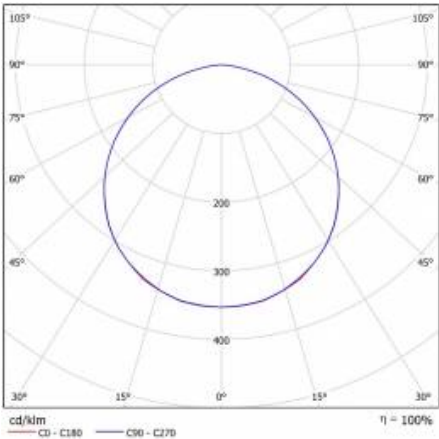


# COMPACT LED EVO N 2750LM PLX II KL IP65 620X620 830 (24W)

---

DETAILED CARD  
**TECHNICAL DETAILS**

---



COMPACT LED EVO N IP65

# COMPACT LED EVO N 2750LM PLX II KL IP65 620X620 830 (24W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
630279	Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special



Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date:14 July 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 357/2023