

COMPACT LED EVO N 3550LM PLX II KL IP65 620X620 830 (32W)

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|------|
| Ingress protection: | IP65 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 32 |
| Luminous flux [lm]*: | 3550 |
| Colour rendering index: | >80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | E |
| Material of the body: | ABS |
| Diffuser material: | PC |
| Diffuser type: | OPAL |

CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Special brackets for mounting COMPACT lamps in surface-mounted version for use on uneven ceilings. These holders ensure a solid fixing while maintaining the distance between the ceiling and the lamp.

* The UGR coefficient is met for the typical use of the luminaire

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.


COMPACT LED EVO N 3550LM PLX II KL IP65 620X620 830 (32W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|------------|----------------------------|---|
| Index: | 628214 | Colour of the body: | white |
| Light source: | LED module | Dimensions (H/W/T/S) [mm]: | 66/620/620/0 |
| Nominal power [W]: | 32 | Mounting dimensions [mm]: | 525/410 |
| Rated power of the luminaire [W]: | 33 | Impact resistance: | IK07 |
| Supply voltage [V]: | 220-240 | Ingress protection: | IP65 |
| Frequency [Hz]: | 50 - 60 | Mounting version: | surface |
| Luminous flux [lm]: | 3550 | Working temperature [°C]: | from -20 to +25 |
| Luminous efficacy [lm/W]: | 107 | Net weight [kg]: | 3.400 |
| Energy efficiency class: | E | Warranty [years]: | 5 |
| Electrical protection class: | II | CE certificate: | 357/2023 |
| Colour temperature [K]: | 3000 | PZH certificate: | B-BK-60212-0070/20 B-BK-60212-0042/20 |
| Colour rendering index: | >80 | EAN: | 5905963628214 |
| SDCM: | ≤ 3 | Category type: | louvres |
| Power factor: | 0.90 | LED lifespan L70B50 [h]: | 132000 |
| Diffuser material: | PC | LED lifespan L80B20 [h]: | 84000 |
| Diffuser type: | OPAL | Manual: | Download PDF |
| Diffuser colour: | white | LED lifespan L90B10 [h]: | 42000 |
| Material of the body: | ABS | ENEC Certificate: | |

LIGHT CURVES

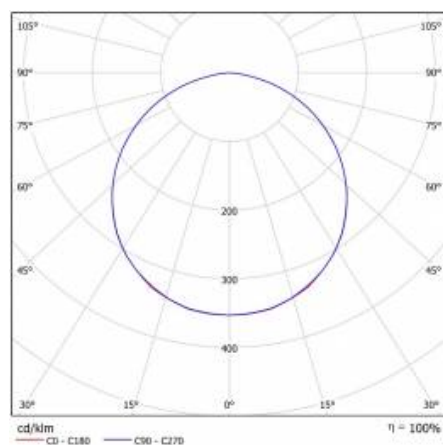

COMPACT LED EVO N 3550LM PLX II KL IP65 620X620 830 (32W)

DETAILED CARD

TECHNICAL DETAILS




COMPACT LED EVO N IP65

COMPACT LED EVO N 3550LM PLX II KL IP65 620X620 830 (32W)

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|--------|---|
| 630279 | Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special |

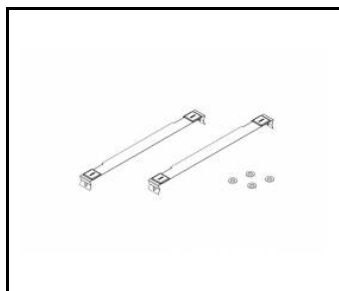

Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date: 29 August 2023

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 357/2023