

COMPACT LED EVO N 6750LM PLX I KL. IP65 620X620 840 (60W)

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|------|
| Ingress protection: | IP65 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 60 |
| Luminous flux [lm]*: | 6750 |
| Colour rendering index: | >80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | E |
| Material of the body: | ABS |
| Diffuser material: | PC |
| Diffuser type: | OPAL |

CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Special brackets for mounting COMPACT lamps in surface-mounted version for use on uneven ceilings. These holders ensure a solid fixing while maintaining the distance between the ceiling and the lamp.

* The UGR coefficient is met for the typical use of the luminaire

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.


COMPACT LED EVO N 6750LM PLX I KL. IP65 620X620 840 (60W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|------------|----------------------------|---|
| Nominal power [W]: | 60 | Dimensions (H/W/T/S) [mm]: | 66/620/620/0 |
| Index: | 628368 | Mounting dimensions [mm]: | 525/410 |
| Colour temperature [K]: | 4000 | Impact resistance: | IK07 |
| Light source: | LED module | Ingress protection: | IP65 |
| Luminous flux [lm]: | 6750 | Mounting version: | surface |
| Diffuser type: | OPAL | Working temperature [°C]: | from -20 to +25 |
| Rated power of the luminaire [W]: | 65 | Net weight [kg]: | 3.450 |
| Supply voltage [V]: | 220-240 | Warranty [years]: | 5 |
| Frequency [Hz]: | 50 - 60 | CE certificate: | 357/2023 |
| Luminous efficacy [lm/W]: | 103 | PZH certificate: | B-BK-60212-0070/20 B-BK-60212-0042/20 |
| Energy efficiency class: | E | EAN: | 5905963628368 |
| Electrical protection class: | I | Category type: | louvres |
| Colour rendering index: | >80 | LED lifespan L70B50 [h]: | 115000 |
| SDCM: | ≤ 3 | LED lifespan L80B20 [h]: | 72000 |
| Power factor: | 0.90 | Manual: | Download PDF |
| Diffuser material: | PC | LED lifespan L90B10 [h]: | 35000 |
| Diffuser colour: | white | ENEC Certificate: | PL BBJ/010/2021/M1 |
| Material of the body: | ABS | Pliik LDT: | Download |
| Colour of the body: | white | | |

LIGHT CURVES

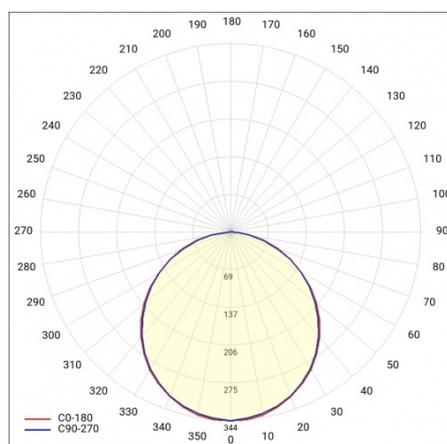

COMPACT LED EVO N 6750LM PLX I KL. IP65 620X620 840 (60W)

DETAILED CARD

TECHNICAL DETAILS




COMPACT LED EVO N IP65

COMPACT LED EVO N 6750LM PLX I KL. IP65 620X620 840 (60W)

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|--------|---|
| 630279 | Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special |

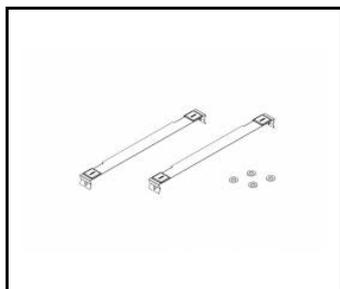

Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 357/2023