

# COMPACT LED EVO N 8100LM PRM I KL. IP65 620X620 840 (60W)

DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK07
Nominal power [W]:	60
Luminous flux [lm]*:	8100
Colour rendering index:	80
SDCM:	≤ 3
Energy efficiency class:	D
Material of the body:	ABS
Diffuser material:	PC
Diffuser type:	PRM

## CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Special brackets for mounting COMPACT lamps in surface-mounted version for use on uneven ceilings. These holders ensure a solid fixing while maintaining the distance between the ceiling and the lamp.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.


# COMPACT LED EVO N 8100LM PRM I KL. IP65 620X620 840 (60W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	628382	Mounting dimensions [mm]:	525/410
EAN:	5905963628382	Impact resistance:	IK07
Light source:	LED module	Ingress protection:	IP65
Rated power of the luminaire [W]:	65	Mounting version:	surface
Nominal power [W]:	60	Working temperature [°C]:	from -20 to +25
Supply voltage [V]:	220-240	Number on the palette [pcs]:	40
Frequency [Hz]:	50 - 60	Net weight [kg]:	3.450
Luminous flux [lm]:	8100	Category type:	troffers
Luminous efficacy [lm/W]:	124	AC voltage range [V]:	198 - 264
Energy efficiency class:	D	DC voltage range [V]:	176 – 280
Electrical protection class:	I	UGR (4H8H):	19-22,9
Colour temperature [K]:	4000	LED lifespan L70B50 [h]:	115000
Colour rendering index:	80	LED lifespan L80B20 [h]:	72000
SDCM:	≤ 3	LED lifespan L90B10 [h]:	35000
Power factor:	0.90	ETIM class:	EC002892
Beam angle [°]:	120	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	PRM	CE certificate:	<a href="#">357/2023</a>
Diffuser colour:	transparent	ENEC Certificate:	<a href="#">PL BBJ/010/2021/M1</a>
Material of the body:	ABS	PZH certificate:	<a href="#">B-BK-60212-0070/20 B-BK-60212-0042/20</a>
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	66/620/620/0	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

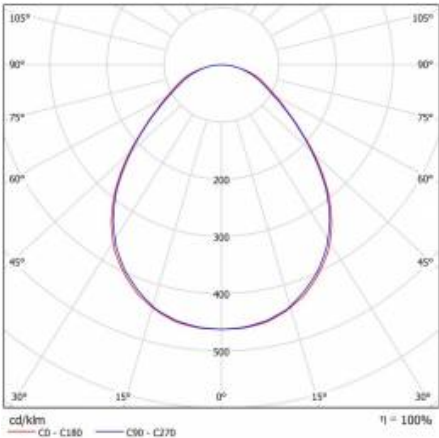


# COMPACT LED EVO N 8100LM PRM I KL. IP65 620X620 840 (60W)

DETAILED CARD  
TECHNICAL DETAILS



COMPACT LED EVO PRM



COMPACT LED EVO N IP65

# COMPACT LED EVO N 8100LM PRM I KL. IP65 620X620 840 (60W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
630279	Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special



Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date:14 July 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 357/2023