MITRA LED 1550LM 3000K RM1 IP66 I KL. (13W)

DETAILED CARD



TECHNICAL PARAMETERS

Light source:	LED module
Ingress protection:	IP66
Nominal power [W]:	13
Luminous flux [lm]*:	1550
Colour temperature [K]:	3000
SDCM:	3
Color rendering index (Ra) >:	80
Electrical protection class:	I
Energy efficiency class:	D
Material of the body:	PP+FG

CHARACTERISTICS

LED fitting with high luminous efficiency and an energy-saving, integrated LED panel. Body made of polypropylene (PP) with glass fiber (GF), aluminum handle and polycarbonate diffuser (PC).
The lamp is available in two versions of light distribiution:
- general G1 - with a frozen diffuser,
- road RM1 - with a transparent diffuser and directional lens matrices made of PMMA.
IP66 ingress protection class and IK07 impact-rating features make this fitting shock-resistant (vandal-resistant).The integrated handle allows for top mounting to the pole. Colour of the body: gray (RAL 7010).
Standard equipped with:
- surge protection (SP10kV),
- H07RN-F cable with a length of 0.6 m and an IP66 quick connection.

APPLICATION

Fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: post-top mounting. Mounting grip integrated with the fitting.

MITRA LED 1550LM 3000K RM1 IP66 I KL. (13W)


DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	956249
EAN:	5905963956249
Light source:	LED module
Nominal power [W]:	13
Rated power of the luminaire [W]:	12
Luminous flux [lm]:	1550
Luminous efficacy [lm/W]:	128
Energy efficiency class:	D
Electrical protection class:	I
Colour temperature [K]:	3000
Color rendering index (Ra) >:	80
SDCM:	3
Power factor:	0.95
LED lifespan L70B50 [h]:	90000
Surge protection [kV]:	2
Diffuser material:	PC
Diffuser type:	transparent
Diffuser colour:	transparent
Optics material:	PMMA
Optics:	matrix lens
Material of the body:	PP+FG
Colour of the body:	grey

Dimensions (H/W/T/S) [mm]:	398/398/175
Mounting dimensions [mm]:	ø60
Ingress protection:	IP66
Mounting version:	on the pole
Working temperature [°C]:	from -15 to +35
Diode size [mm]:	2835
Dimensions of single box [mm]:	400/400/175
Net weight [kg]:	2
Warranty [years]:	5
Category type:	Park and city lighting
Light distribution type:	RM1
Category of application:	parkings and bicycle paths
Gross weight [kg]:	2
Permeability factor of the diffuser:	0.80
ETIM class:	EC000062
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
ULOR:	0%
Warranty [years]:	5
CE certificate:	100/2023
Manual:	Download PDF
Plik LDT:	Download


LIGHT CURVES

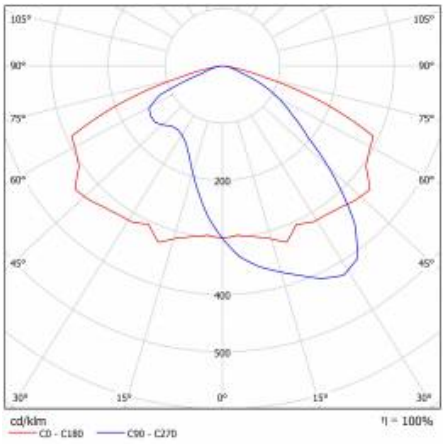

MITRA LED 1550LM 3000K RM1 IP66 I KL. (13W)

DETAILED CARD


TECHNICAL DETAILS



MITRA LED



MITRA LED



MITRA LED

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 100/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl