

# MITRA LED 6450LM 4000K RM1 IP66 I KL. DALI (52W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Light source:</b>	LED module
<b>Ingress protection:</b>	IP66
<b>Nominal power [W]:</b>	52
<b>Luminous flux [lm]*:</b>	6450
<b>Colour temperature [K]:</b>	4000
<b>SDCM:</b>	≤ 3
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	I
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	PP+FG

## CHARACTERISTICS

LED fitting with high luminous efficiency and an energy-saving, integrated LED panel. Body made of polypropylene (PP) with glass fiber (GF), aluminum handle and polycarbonate diffuser (PC).

The lamp is available in two versions of light distribution:

- general G1 - with a frosted diffuser,
- road RM1 - with a transparent diffuser and directional lens matrices made of PMMA.

IP66 ingress protection class and IK07 impact-rating features make this fitting shock-resistant (vandal-resistant). The integrated handle allows for top mounting to the pole. Colour of the body: gray (RAL 7010).

Standard equipped with:

- surge protection (SP10kV),
- H07RN-F cable with a length of 0.6 m and an IP66 quick connection.

## APPLICATION

Fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: post-top mounting. Mounting grip integrated with the fitting.


# MITRA LED 6450LM 4000K RM1 IP66 I KL. DALI (52W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	956492	Dimensions (H/W/T/S) [mm]:	398/398/175
EAN:	5905963956492	Mounting dimensions [mm]:	Ø60
Light source:	LED module	Ingress protection:	IP66
Nominal power [W]:	52	Mounting version:	on the pole
Rated power of the luminaire [W]:	51.30	Working temperature [°C]:	from -15 to +35
Supply voltage [V]:	220-240	Diode size [mm]:	2835
Frequency [Hz]:	50 - 60	Dimensions of single box [mm]:	400/400/175
Luminous flux [lm]:	6450	Net weight [kg]:	2.100
Luminous efficacy [lm/W]:	128	Warranty [years]:	5
Energy efficiency class:	D	Category type:	Park and city lighting
Electrical protection class:	I	Light distribution type:	RM1
Colour temperature [K]:	4000	Category of application:	parkings and bicycle paths
Colour rendering index:	>80	DIMM 1-10V:	yes
SDCM:	≤ 3	DIMM DALI:	yes
Power factor:	0.97	Beam angle [°]:	50000
LED lifespan L70B50 [h]:	90000	Gross weight [kg]:	2.100
Surge protection [kV]:	4	Permeability factor of the diffuser:	0.80
Diffuser material:	PC	ETIM class:	EC000062
Diffuser type:	transparent	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser colour:	transparent	ULOR:	0%
Optics material:	PMMA	Warranty [years]:	5
Optics:	matrix lens	CE certificate:	<a href="#">100/2023</a>
Material of the body:	PP+FG	Manual:	<a href="#">Download PDF</a>
Colour of the body:	grey		

## LIGHT CURVES

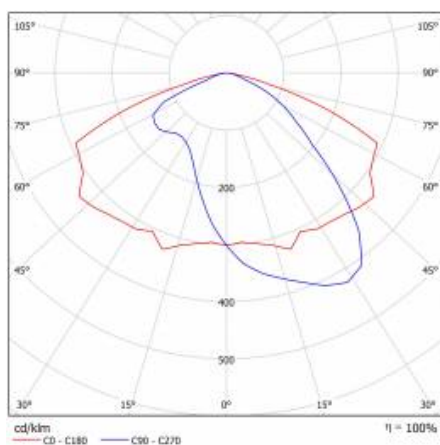

# MITRA LED 6450LM 4000K RM1 IP66 I KL. DALI (52W)

DETAILED CARD

## TECHNICAL DETAILS



MITRA LED



MITRA LED



MITRA LED

Card creation date: 16 December 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 100/2023