

# TUBE LED EVO 2 14W 4000K LS2 30 NARROW BEAM

DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK08
Nominal power [W]:	14
Luminous flux [lm]*:	1350
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	PC
Diffuser type:	transparent

## CHARACTERISTICS

LED luminaire system designed for suspended and surface mounting on walls and ceilings. Provides a combination of high illumination parameters and functionality. With its slim diameter of 42 mm possible to mount in hard-to-reach locations. Mounting is easy and quick. Due to the line lens, it is possible to adjust the fitting to different lighting requirements – three light distribution options: 90°, 60°, 30°.

## APPLICATION


Luminaire intended for both outdoor and indoor use in industry areas and passageways. Provides good surface lighting and is perfect in situations that require eyesight concentration. Four housing sizes available. Suitable for mounting in all types of suspended ceilings (modular, plasterboard).

### DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Nominal power [W]:</b>	14	<b>LED lifespan L70B50 [h]:</b>	50000
<b>Light source:</b>	LED module	<b>Optics material:</b>	PMMA
<b>Colour temperature [K]:</b>	4000	<b>Optics:</b>	lens
<b>Luminous flux [lm]:</b>	1350	<b>Material of the body:</b>	PC
<b>Rated power of the luminaire [W]:</b>	16	<b>Colour of the body:</b>	silver
<b>Diffuser type:</b>	transparent	<b>Mounting dimensions [mm]:</b>	767
<b>Supply voltage [V]:</b>	220-240	<b>Impact resistance:</b>	IK08
<b>Beam angle [°]:</b>	30	<b>Ingress protection:</b>	IP65
<b>Frequency [Hz]:</b>	50 - 60	<b>Mounting version:</b>	surface, suspended
<b>Through wiring:</b>	LS2	<b>Net weight [kg]:</b>	0.800
<b>Luminous efficacy [lm/W]:</b>	96	<b>Warranty [years]:</b>	5
<b>Dimensions (H/W/T/S) [mm]:</b>	42/45/785	<b>CE certificate:</b>	<a href="#">226/2023</a>
<b>Energy efficiency class:</b>	F	<b>Index:</b>	269134
<b>Electrical protection class:</b>	II	<b>EAN:</b>	5905963269134
<b>Colour rendering index:</b>	>80	<b>Category type:</b>	battens
<b>SDCM:</b>	≤ 3	<b>Warranty [years]:</b>	5
<b>Power factor:</b>	0.92	<b>Manual:</b>	<a href="#">Download PDF</a>
		<b>Pliik LDT:</b>	<a href="#">Download</a>

## LIGHT CURVES

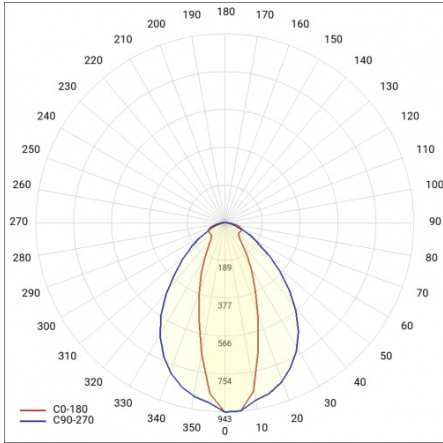

# TUBE LED EVO 2 14W 4000K LS2 30 NARROW BEAM

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
267604	Tube LED EVO surface mounting bracket adjustable +/- 100 degrees
266591	Tube LED EVO electric suspension
266607	Tube LED EVO suspension cord
266829	Tube LED EVO Suspension (round box)
266492	Star connector TUBE LED EVO system
266485	Star connector TUBE LED EVO system matt white
266478	Star connector TUBE LED EVO system matt black



Tube LED EVO surface mounting bracket adjustable +/- 100 degrees (267604)



Tube LED EVO suspension cord (266607)



Star connector TUBE LED EVO system (266492)

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 226/2023