

# TUBE LED EVO 2 DALI 21W 4000K LS2 30 NARROW BEAM

DETAILED CARD



## TECHNICAL PARAMETERS

|                          |             |
|--------------------------|-------------|
| Ingress protection:      | IP65        |
| Impact resistance:       | IK08        |
| Nominal power [W]:       | 21          |
| Luminous flux [lm]*:     | 2000        |
| Colour temperature [K]:  | 4000        |
| Colour rendering index:  | >80         |
| SDCM:                    | ≤ 3         |
| Energy efficiency class: | F           |
| Material of the body:    | PC          |
| Diffuser type:           | transparent |

## CHARACTERISTICS

LED luminaire system designed for suspended and surface mounting on walls and ceilings. Provides a combination of high illumination parameters and functionality. With its slim diameter of 42 mm possible to mount in hard-to-reach locations. Mounting is easy and quick. Due to the line lens, it is possible to adjust the fitting to different lighting requirements – three light distribution options: 90°, 60°, 30°.

## APPLICATION

Luminaire intended for both outdoor and indoor use in industry areas and passageways. Provides good surface lighting and is perfect in situations that require eyesight concentration. Four housing sizes available. Suitable for mounting in all types of suspended ceilings (modular, plasterboard).


# TUBE LED EVO 2 DALI 21W 4000K LS2 30 NARROW BEAM

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

|                                   |             |                           |                              |
|-----------------------------------|-------------|---------------------------|------------------------------|
| Nominal power [W]:                | 21          | LED lifespan L70B50 [h]:  | 50000                        |
| Light source:                     | LED module  | Optics material:          | PMMA                         |
| Colour temperature [K]:           | 4000        | Optics:                   | lens                         |
| Luminous flux [lm]:               | 2000        | Material of the body:     | PC                           |
| Rated power of the luminaire [W]: | 24          | Colour of the body:       | silver                       |
| Diffuser type:                    | transparent | Mounting dimensions [mm]: | 1047                         |
| Supply voltage [V]:               | 220-240     | Impact resistance:        | IK08                         |
| Beam angle [°]:                   | 30          | Ingress protection:       | IP65                         |
| Frequency [Hz]:                   | 50 - 60     | Mounting version:         | surface, suspended           |
| DIMM DALI:                        | yes         | Net weight [kg]:          | 1.100                        |
| Through wiring:                   | LS2         | Warranty [years]:         | 5                            |
| Luminous efficacy [lm/W]:         | 95          | CE certificate:           | <a href="#">226/2023</a>     |
| Dimensions (H/W/T/S) [mm]:        | 42/45/1065  | Index:                    | 267697                       |
| Energy efficiency class:          | F           | EAN:                      | 5905963267697                |
| Electrical protection class:      | I           | Category type:            | battens                      |
| Colour rendering index:           | >80         | Warranty [years]:         | 5                            |
| SDCM:                             | ≤ 3         | Manual:                   | <a href="#">Download PDF</a> |
| Power factor:                     | 0.92        | Plik LDT:                 | <a href="#">Download</a>     |

### LIGHT CURVES

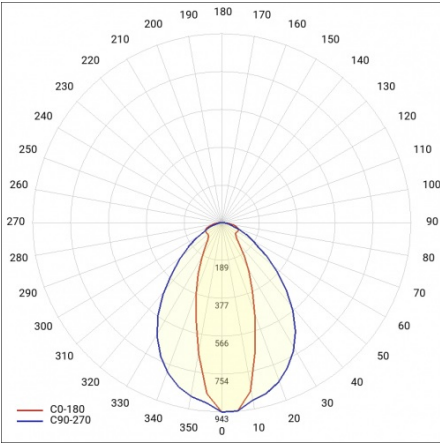

# TUBE LED EVO 2 DALI 21W 4000K LS2 30 NARROW BEAM

## DETAILED CARD

### ACCESSORIES AVAILABLE

| index  | Name   |
|--------|--|
| 267604 | Tube LED EVO surface mounting bracket adjustable +/- 100 degrees |
| 266591 | Tube LED EVO electric suspension                                 |
| 266607 | Tube LED EVO suspension cord                                     |
| 266829 | Tube LED EVO Suspension (round box)                              |
| 266492 | Star connector TUBE LED EVO system                               |
| 266485 | Star connector TUBE LED EVO system matt white                    |
| 266478 | Star connector TUBE LED EVO system matt black                    |



Tube LED EVO surface mounting bracket adjustable +/- 100 degrees (267604)



Tube LED EVO suspension cord (266607)



Star connector TUBE LED EVO system (266492)

Card creation date: 28 May 2020

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 226/2023