

# DL 220 LED 3000K 12W WHITE

DETAILED CARD



## TECHNICAL PARAMETERS

Light source:	LED module
Ingress protection:	IP65
Nominal power [W]:	12
Luminous flux [lm]*:	1000
Colour temperature [K]:	3000
Colour rendering index:	>80
Energy efficiency class:	G
Material of the body:	ABS
Colour of the body:	white
Diffuser material:	PC

## CHARACTERISTICS

Round LED downlight recessed mounting, even light distribution and high ingress protection class IP65 (diffuser), IP40 (top) equipped with an integrated energy-saving light source LED GO! Body made of ABS plastic with prismatic PC diffuser. Available options with DALI/DIMM 1-10V or with emergency module. Colour temperature 3000K/4000K, CRI>80, LED lifespan 50 000h (L70B50) ta= 25 °C.

## APPLICATION

Luminaire designed for both indoor (offices, routes, farm buildings) and outdoor use (IP65). Due to the possibility of making it with ballast compatible with external lighting systems, it is particularly recommended to A class office buildings. Provides good surface lighting and works well in situations that require eyesight concentration. Designed for mounting in each type of suspended ceiling (modular, plasterboard).


# DL 220 LED 3000K 12W WHITE

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	white
Nominal power [W]:	12	Dimensions (H/W/T/S) [mm]:	ø220/65
Rated power of the luminaire [W]:	16	Mounting dimensions [mm]:	ø205
Supply voltage [V]:	220-240	Impact resistance:	IK08
Frequency [Hz]:	50 - 60	Ingress protection:	IP65
Luminous flux [lm]:	1000	Mounting version:	recessed
Luminous efficacy [lm/W]:	60	Working temperature [°C]:	from -20 to +35
Energy efficiency class:	G	Net weight [kg]:	0.780
Electrical protection class:	I	CE certificate:	<a href="#">114/2019</a>
Colour temperature [K]:	3000	Warranty [years]:	5
Colour rendering index:	>80	PZH certificate:	<a href="#">HK/B/0987/01/2014</a>
Power factor:	0.61	Index:	515033
LED lifespan L70B50 [h]:	50000	EAN:	5905963515033
Beam angle [°]:	120	Category type:	downlights
Diffuser material:	PC	ETIM class:	EC002892
Diffuser type:	PRM	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Material of the body:	ABS	Manual:	<a href="#">Download PDF</a>

### LIGHT CURVES

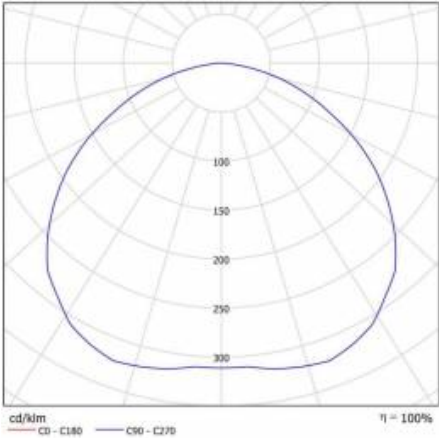

Card creation date: 27 August 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 114/2019



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)