

DL 220 LED 3000K 8W WHITE AW3H AT MAT

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|--------------------------|------------|
| Light source: | LED module |
| Ingress protection: | IP65 |
| Nominal power [W]: | 8 |
| Luminous flux [lm]*: | 600 |
| Colour temperature [K]: | 3000 |
| Colour rendering index: | >80 |
| Energy efficiency class: | G |
| Material of the body: | ABS |
| Colour of the body: | white |
| Diffuser material: | PC |

CHARACTERISTICS

Round LED downlight recessed mounting, even light distribution and high ingress protection class IP65 (diffuser), IP40 (top) equipped with an integrated energy-saving light source LED GO! Body made of ABS plastic with prismatic PC diffuser. Available options with DALI/DIMM 1-10V or with emergency module. Colour temperature 3000K/4000K, CRI>80, LED lifespan 50 000h (L70B50) ta= 25 °C.

APPLICATION

Luminaire designed for both indoor (offices, routes, farm buildings) and outdoor use (IP65). Due to the possibility of making it with ballast compatible with external lighting systems, it is particularly recommended to A class office buildings. Provides good surface lighting and works well in situations that require eyesight concentration. Designed for mounting in each type of suspended ceiling (modular, plasterboard).


DL 220 LED 3000K 8W WHITE AW3H AT MAT

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|------------|----------------------------|---|
| Light source: | LED module | Dimensions (H/W/T/S) [mm]: | ø220/65 |
| Nominal power [W]: | 8 | Mounting dimensions [mm]: | ø205 |
| Rated power of the luminaire [W]: | 11 | Impact resistance: | IK08 |
| Supply voltage [V]: | 220-240 | Ingress protection: | IP65 |
| Frequency [Hz]: | 50 - 60 | Mounting version: | recessed |
| Luminous flux [lm]: | 600 | Working temperature [°C]: | from 0 to +35 |
| Luminous efficacy [lm/W]: | 54 | Emergency lighting [h]: | 3 |
| Energy efficiency class: | G | Net weight [kg]: | 1.250 |
| Electrical protection class: | I | CE certificate: | 114/2019 |
| Colour temperature [K]: | 3000 | Warranty [years]: | 2 / 0.5 (bateria) |
| Colour rendering index: | >80 | PZH certificate: | HK/B/0987/01/2014 |
| Power factor: | 0.55 | Index: | 519123 |
| LED lifespan L70B50 [h]: | 50000 | EAN: | 5905963519123 |
| Beam angle [°]: | 120 | Category type: | downlights |
| Diffuser material: | PC | Autotest: | yes |
| Diffuser type: | PRM MAT | ETIM class: | EC002892 |
| Material of the body: | ABS | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Colour of the body: | white | Manual: | Download PDF |

LIGHT CURVES

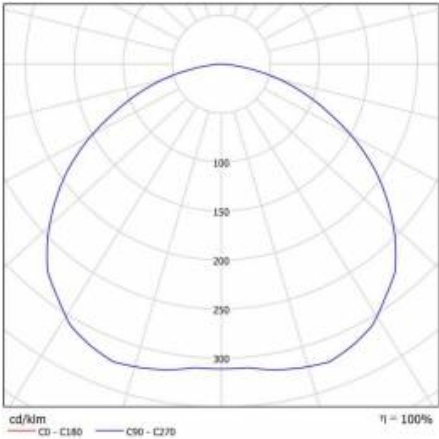

Card creation date: 27 August 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 114/2019