


# QUBE 1 LED 1660LM 840 IP65 I CL. 18° (18W) RAL 7037

DETAILED CARD

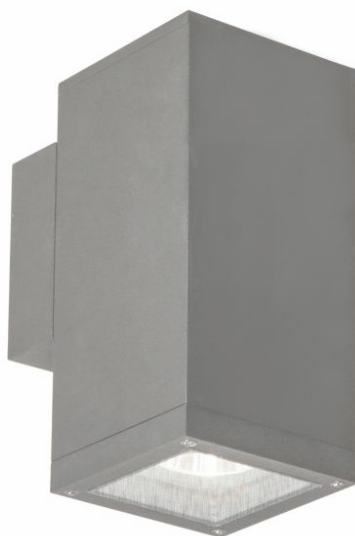

## TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP65
Impact resistance:	IK06
Rated power of the luminaire [W]*:	18
Luminous flux [lm]*:	1540 - 1865
Colour temperature [K]:	3000; 4000; 5700
Energy efficiency class:	F
Material of the body:	aluminium
Diffuser material:	szkło hart.
Diffuser type:	transparentny

## CHARACTERISTICS

This energy-saving, outdoor accent LED fitting ensures economical and long-term operation without the need to replace light sources. It has high ingress protection rating of IP65—from dust ingress and water jets from any direction. The ingress protection is ensured by its design—aluminium body and tempered glass additionally protected with a seal. The fitting is available in many light distribution options and two lighting versions:

- up or down

- up and down

## APPLICATION

The fitting for wall mounting (directly to the surface by means of wall plugs) is designed especially for accent outdoor lighting of facades of: hotels, offices, apartment buildings but also private houses, passageways and entrance areas.

# QUBE 1 LED 1660LM 840 IP65 I CL. 18° (18W) RAL 7037

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	moduł LED	Colour of the body:	RAL7037
Rated power of the luminaire [W]:	18	Dimensions (H/W/T/S) [mm]:	204/136; 250/136
Supply voltage [V]:	220-240	Mounting dimensions [mm]:	100/136
Frequency [Hz]:	50-60	Impact resistance:	IK06
Luminous flux [lm]:	1540 - 1865	Ingress protection:	IP65
Energy efficiency class:	F	Warranty [years]:	2
Electrical protection class:	I	Index:	x
Colour temperature [K]:	3000; 4000; 5700	EAN:	x
Beam angle [°]:	12; 18; 32	Category type:	accent lighting
Diffuser material:	szkło hart.	Version:	góra i dół; góra lub dół
Diffuser type:	transparentny	AC voltage range [V]:	220 - 240
Optics material:	PC	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Optics:	Reflektor	Manual:	Pobierz PDF
Material of the body:	aluminium		

Card creation date:12 January 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 89/2019



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl