

# COMPACT LED EVO N 3850LM PLX II KL IP20 1200X250 840 (32W)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Ingress protection:</b>	IP20
<b>Nominal power [W]:</b>	32
<b>Luminous flux [lm]*:</b>	3850
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Compact LED luminaire designed for surface mounting or modular ceilings. Equipped with energy-saving LED modules and an evenly highlighted opal diffuser, providing low glare. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Standard Deviation Colour Matching (SDCM): ≤3. COMPACT LED EVO N 1200x250 with nPRM nano-prismatic diffuser, can be used wherever low UGR is required.

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.


# COMPACT LED EVO N 3850LM PLX II KL IP20 1200X250 840 (32W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	32	Colour of the body:	white
Index:	905551	Dimensions (H/W/T/S) [mm]:	1195/250/66
Light source:	LED module	Ingress protection:	IP20
Colour temperature [K]:	4000	Mounting version:	surface mounted; recessed mounted in modular ceiling possible
Luminous flux [lm]:	3850	Working temperature [°C]:	from -20 to +35
Diffuser type:	OPAL	Net weight [kg]:	2.300
Supply voltage [V]:	220-240	Warranty [years]:	5
Diffuser material:	PS	EAN:	5905963905551
Frequency [Hz]:	50 - 60	Category type:	louvres
Luminous efficacy [lm/W]:	111	LED lifespan L70B50 [h]:	132000
Energy efficiency class:	E	LED lifespan L80B20 [h]:	84000
Electrical protection class:	II	LED lifespan L90B10 [h]:	42000
Colour rendering index:	>80	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
SDCM:	≤ 3	CE certificate:	<a href="#">361/2023</a>
Power factor:	0.95	PZH certificate:	<a href="#">B-BK-60212-0070/20 B-BK-60212-0042/20</a>
Material of the body:	ABS	Warranty [years]:	5
		Manual:	<a href="#">Download PDF</a>
		ENEC Certificate:	
		Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

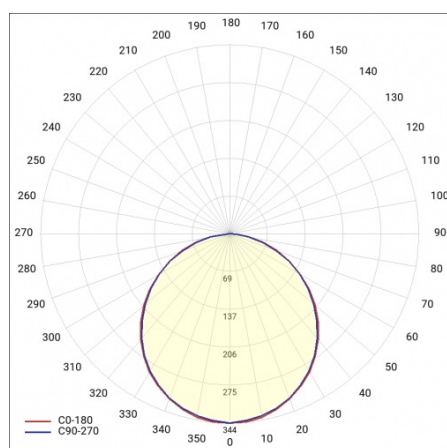

Card creation date: 08 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 361/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)