


QUBE 2 LED 1735LM 830 IP65 I CL. 32° (24W) RAL 7037

DETAILED CARD

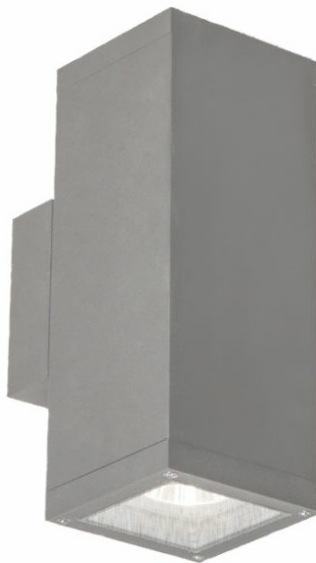

TECHNICAL PARAMETERS

| | |
|------------------------------------|----------------|
| Index: | 959899 |
| Ingress protection: | IP65 |
| Impact resistance: | IK06 |
| Rated power of the luminaire [W]*: | 24 |
| Luminous flux [lm]*: | 1735 |
| Colour temperature [K]: | 3000 |
| Energy efficiency class: | F |
| Material of the body: | aluminium |
| Diffuser material: | tempered glass |
| Diffuser type: | transparent |

CHARACTERISTICS

This energy-saving, outdoor accent LED fitting ensures economical and long-term operation without the need to replace light sources. It has high ingress protection rating of IP65—from dust ingress and water jets from any direction. The ingress protection is ensured by its design—aluminium body and tempered glass additionally protected with a seal. The fitting is available in many light distribution options and two lighting versions:

- up or down
- up and down

APPLICATION

The fitting for wall mounting (directly to the surface by means of wall plugs) is designed especially for accent outdoor lighting of facades of: hotels, offices, apartment buildings but also private houses, passageways and entrance areas.

QUBE 2 LED 1735LM 830 IP65 I CL. 32° (24W) RAL 7037

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|----------------|---------------------------|---|
| Light source: | LED module | Colour of the body: | RAL7037 |
| Rated power of the luminaire [W]: | 24 | Mounting dimensions [mm]: | 100/136 |
| Colour temperature [K]: | 3000 | Impact resistance: | IK06 |
| Luminous flux [lm]: | 1735 | Ingress protection: | IP65 |
| Supply voltage [V]: | 220-240 | Warranty [years]: | 2 |
| Frequency [Hz]: | 50 - 60 | Index: | 959899 |
| Beam angle [°]: | 32 | EAN: | 5905963959899 |
| Dimensions (H/W/T/S) [mm]: | 250/136 | Category type: | accent lighting |
| Energy efficiency class: | F | Version: | up and down |
| Electrical protection class: | I | AC voltage range [V]: | 220 - 240 |
| Diffuser material: | tempered glass | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Diffuser type: | transparent | Luminous efficacy [lm/W]: | 72 |
| Optics material: | PC | Manual: | Download PDF |
| Optics: | Reflektor | Plik LDT: | Download |
| Material of the body: | aluminium | | |

LIGHT CURVES

