


# QUBE 2 LED 1865LM 857 IP65 I CL. 12° (24W) RAL 7037

DETAILED CARD

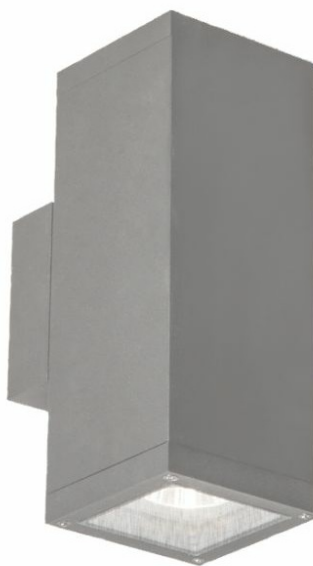

## TECHNICAL PARAMETERS

<b>Index:</b>	959851
<b>Ingress protection:</b>	IP65
<b>Impact resistance:</b>	IK06
<b>Rated power of the luminaire [W]*:</b>	24
<b>Luminous flux [lm]*:</b>	1865
<b>Colour temperature [K]:</b>	5700
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	aluminium
<b>Diffuser material:</b>	tempered glass
<b>Diffuser type:</b>	transparent

## CHARACTERISTICS

This energy-saving, outdoor accent LED fitting ensures economical and long-term operation without the need to replace light sources. It has high ingress protection rating of IP65—from dust ingress and water jets from any direction. The ingress protection is ensured by its design—aluminium body and tempered glass additionally protected with a seal. The fitting is available in many light distribution options and two lighting versions:

- up or down
- up and down

## APPLICATION

The fitting for wall mounting (directly to the surface by means of wall plugs) is designed especially for accent outdoor lighting of facades of: hotels, offices, apartment buildings but also private houses, passageways and entrance areas.


# QUBE 2 LED 1865LM 857 IP65 I CL. 12° (24W) RAL 7037

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	RAL7037
Rated power of the luminaire [W]:	24	Mounting dimensions [mm]:	100/136
Colour temperature [K]:	5700	Impact resistance:	IK06
Luminous flux [lm]:	1865	Ingress protection:	IP65
Supply voltage [V]:	220-240	Warranty [years]:	2
Frequency [Hz]:	50 - 60	Index:	959851
Beam angle [°]:	12	EAN:	5905963959851
Dimensions (H/W/T/S) [mm]:	250/136	Category type:	accent lighting
Energy efficiency class:	F	Version:	up and down
Electrical protection class:	I	AC voltage range [V]:	220 - 240
Diffuser material:	tempered glass	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	transparent	Luminous efficacy [lm/W]:	78
Optics material:	PC	Manual:	Download PDF
Optics:	Reflektor	Plik LDT:	<a href="#">Download</a>
Material of the body:	aluminium		

## LIGHT CURVES

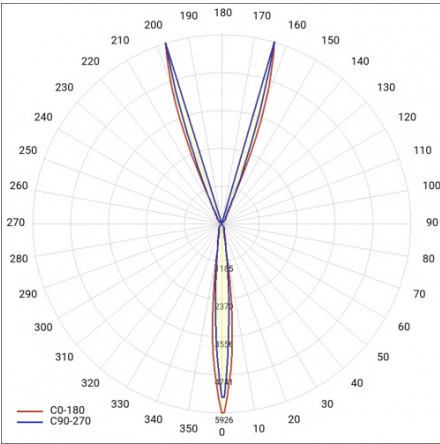

Card creation date:12 January 2021

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 89/2019



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)