


# CAPELLA LED PLUS FOR IOT RING 1020LM 840 IP54 WHITE (11W) 340MM

DETAILED CARD

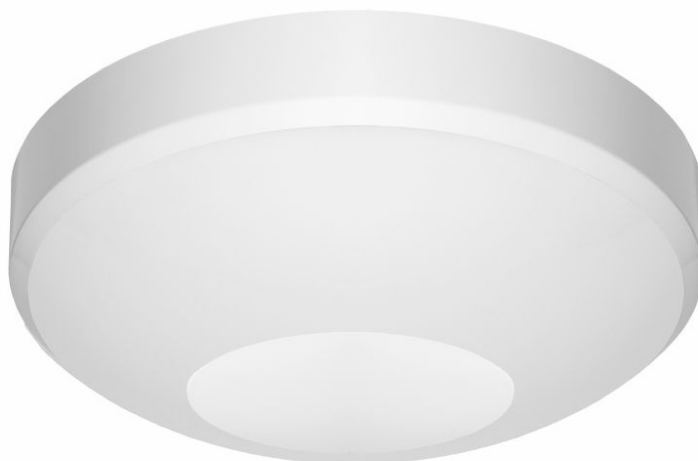

## TECHNICAL PARAMETERS

Index:	951046
Ingress protection:	IP54
Impact resistance:	IK07
Nominal power [W]:	11
Luminous flux [lm]*:	1020
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	ABS
Ring material:	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

The IoT luminaire version is adapted for integration with additional controllers.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


# CAPELLA LED PLUS FOR IOT RING 1020LM 840 IP54 WHITE (11W) 340MM

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Ring material:	ABS
Nominal power [W]:	11	Ring colour:	white
Rated power of the luminaire [W]:	11.90	Dimensions (H/W/T/S) [mm]:	340/105
Supply voltage [V]:	220-240	Mounting dimensions [mm]:	158
Frequency [Hz]:	50 - 60	Impact resistance:	IK07
Luminous flux [lm]:	1020	Ingress protection:	IP54
Luminous efficacy [lm/W]:	86	Mounting version:	surface
Energy efficiency class:	F	Working temperature [°C]:	from -10 to +35
Electrical protection class:	II	Accessories included:	assembly system for IoT, sealing, extraction, 2x cable cover, screws, dowels 6mm
Colour temperature [K]:	4000	Dimensions of single box [mm]:	342/342/122
Colour rendering index:	>80	Net weight [kg]:	1.600
SDCM:	≤ 3	Warranty [years]:	5
Power factor:	0.92	CE certificate:	<a href="#">375/2023</a>
LED lifespan L70B50 [h]:	60000	Index:	951046
Beam angle [°]:	120	EAN:	5905963951046
Diffuser material:	PC	Category type:	bulkheads
Diffuser type:	OPAL	Version:	xREADY RING
Diffuser colour:	white	UGR (4H8H):	16,1-24,2
Optics material:	PMMA	Light distribution type:	lambertian
Optics:	lens	Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
Material of the body:	ABS	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

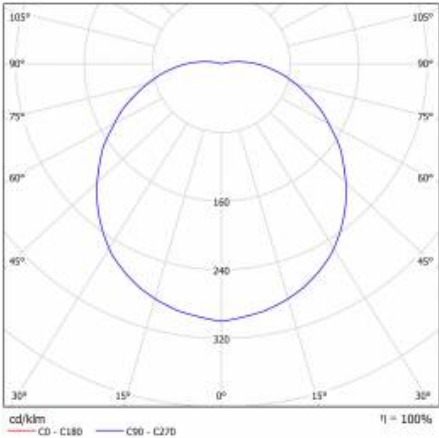

# CAPELLA LED PLUS FOR IOT RING 1020LM 840 IP54 WHITE (11W) 340MM

DETAILED CARD  
TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date: 23 March 2020  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 375/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl