

CAPELLA LED PLUS PRO TS IOT BT RCR HYT DALI 1500LM 840 IP54 WHITE (15W) 320MM

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|--------|
| Index: | 951343 |
| Ingress protection: | IP54 |
| Impact resistance: | IK06 |
| Nominal power [W]: | 15 |
| Luminous flux [lm]*: | 1500 |
| Colour temperature [K]: | 4000 |
| SDCM: | 3 |
| Energy efficiency class: | E |
| Material of the body: | ABS |
| Ring material: | ABS |

CHARACTERISTICS

Capella LED Plus IoT is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications. **IoT characteristics** The **IoT BT RCR HYT DALI** version has: a built-in **BT HYT** module that allows you to program functions in the Lena Lighting Clue app and control in real time; **RCR** motion and daylight sensor hidden under the shade and **DALI** driver for dimming the light source.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


CAPELLA LED PLUS PRO TS IOT BT RCR HYT DALI 1500LM 840 IP54 WHITE (15W) 320MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|--|---------------|---|--|
| Index: | 951343 | Ring colour: | white |
| EAN: | 5905963951343 | Dimensions (H/W/T/S) [mm]: | 320/105 |
| Light source: | LED module | Mounting dimensions [mm]: | 158 |
| Nominal power [W]: | 15 | Impact resistance: | IK06 |
| Rated power of the luminaire [W]: | 15.47 | Ingress protection: | IP54 |
| Supply voltage [V]: | 220-240 | Mounting version: | surface |
| Frequency [Hz]: | 50 - 60 | Working temperature [°C]: | from -10 to +35 |
| Luminous flux [lm]: | 1500 | Motion sensor: | yes |
| Luminous efficacy [lm/W]: | 93 | DIMM DALI: | yes |
| Energy efficiency class: | E | Accessories included: | assembly system for IoT, sealing, extraction, 2x cable cover, screws, dowels 6mm |
| Electrical protection class: | II | Master/slave: | master/slave |
| Colour temperature [K]: | 4000 | Dimensions of single box [mm]: | 342/342/122 |
| Color rendering index (Ra) >: | 80 | Net weight [kg]: | 0.920 |
| SDCM: | 3 | Category type: | bulkheads |
| Power factor: | 0.94 | Version: | BT RCR HYT DALI |
| LED lifespan L70B50 [h]: | 30000 | AC voltage range [V]: | 220 - 240 |
| Beam angle [°]: | 120 | UGR (4H8H): | 17,5-25,2 |
| Diffuser material: | PC | Light distribution type: | lambertian |
| Diffuser type: | OPAL | Product line: | PRO |
| Diffuser colour: | white | Dimensions of bulk box (H/W/D) [mm]: | 794/1194/982 |
| Optics material: | PMMA | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Optics: | lens | Warranty [years]: | 5 |
| Material of the body: | ABS | CE certificate: | 375/2023 |
| Colour of the body: | white | Manual: | Download PDF |
| Ring material: | ABS | Plik LDT: | Download |

LIGHT CURVES

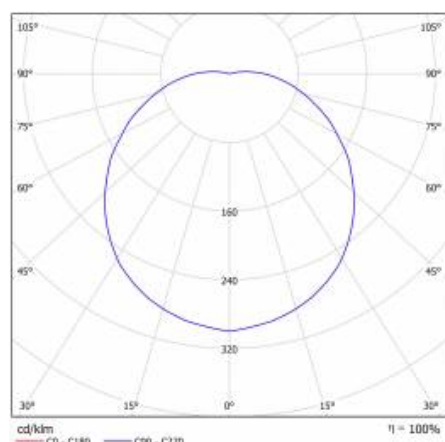

Card creation date: 10 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric and electronic waste equipment regulations (WEEE).

Certificate CE - Nr: 375/2023

LENA
LIGHTING

Lena Lighting S.A.
 ul. Kórnicka 52, 63-000 Środa Wielkopolska
 tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl