


# CAPELLA LED PLUS IOT RING PRO RCR+TS 1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD

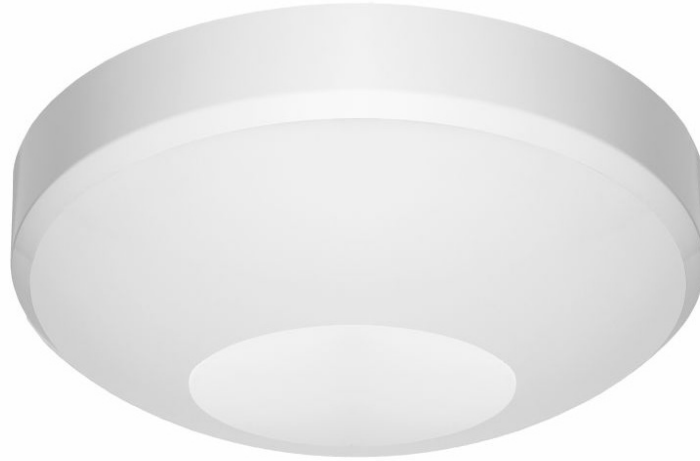

## TECHNICAL PARAMETERS

<b>Index:</b>	951374
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	15
<b>Luminous flux [lm]*:</b>	1400
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 4
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	ABS
<b>Ring material:</b>	ABS

## CHARACTERISTICS

CAPELLA LED is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications.

The IoT luminaire version is adapted for integration with additional controllers.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.


# CAPELLA LED PLUS IOT RING PRO RCR+TS 1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	15	Colour of the body:	white
Index:	951374	Ring material:	ABS
Colour temperature [K]:	3000	Ring colour:	white
EAN:	5905963951374	Dimensions (H/W/T/S) [mm]:	340/105
Luminous flux [lm]:	1400	Mounting dimensions [mm]:	158
Light source:	LED module	Impact resistance:	IK07
Rated power of the luminaire [W]:	16.50	Ingress protection:	IP54
Motion sensor:	yes	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -10 to +35
Master/slave:	master/slave	DIMM DALI:	yes
Frequency [Hz]:	50 - 60	Version:	PRO RING
Luminous efficacy [lm/W]:	86	Accessories included:	assembly system for IoT, sealing, extraction, 2x cable cover, screws, dowels 6mm
Energy efficiency class:	F	Dimensions of single box [mm]:	342/342/122
Electrical protection class:	II	Net weight [kg]:	1.800
Colour rendering index:	>80	Category type:	bulkheads
SDCM:	≤ 4	AC voltage range [V]:	220 - 240
Power factor:	0.95	UGR (4H8H):	17,5-25,2
LED lifespan L70B50 [h]:	30000	Light distribution type:	labertowski
Beam angle [°]:	120	Product line:	PRO RING
Diffuser material:	PC	Dimensions of bulk box (H/W/D) [mm]:	794/1194/982
Diffuser type:	OPAL	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser colour:	white	Warranty [years]:	5
Optics material:	PMMA	CE certificate:	<a href="#">375/2023</a>
Optics:	lens	Manual:	<a href="#">Download PDF</a>
Material of the body:	ABS	Plik LDT:	<a href="#">Download</a>

## LIGHT CURVES

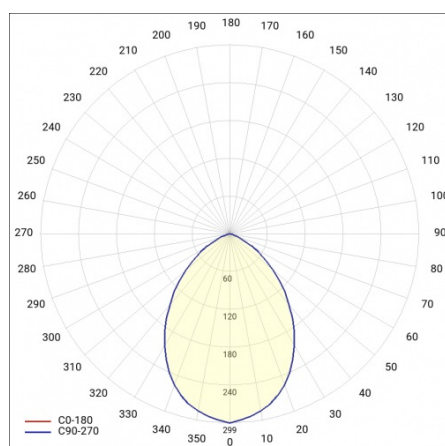

# CAPELLA LED PLUS IOT RING PRO RCR+TS 1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD

## TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date: 10 March 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 375/2023