

CAPELLA LED PLUS RING PRO TS IOT BT DS HYT DALI

1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|--------------------------|--------|
| Index: | 951299 |
| Ingress protection: | IP54 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 15 |
| Luminous flux [lm]*: | 1400 |
| Colour temperature [K]: | 3000 |
| SDCM: | ≤ 4 |
| Energy efficiency class: | F |
| Material of the body: | ABS |
| Ring material: | ABS |

CHARACTERISTICS

Capella LED Plus IoT is a wide line of luminaires combining high aesthetic values and lighting parameters. The body has been made from ABS and the frosted diffuser from impact-resistant polycarbonate (PC). A multitude of versions makes it possible to adapt the luminaire to many non-standard applications. **IoT characteristics** The **IoT BT DS HYT DALI** version has: a built-in **BT HYT** module that allows you to program functions in the Lena Lighting Clue app and control in real time; **DS** daylight sensor hidden under the shade and **DALI** driver for dimming the light source.

APPLICATION

Surface-mounted wall or ceiling luminaire intended for indoor use (utility rooms, staircases, circulation routes). It is also available in a version with an RF motion detector which is especially recommended for use in spaces open to the public.

CAPELLA LED PLUS RING PRO TS IOT BT DS HYT DALI


1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|--------------------------------------|--|
| Index: | 951299 | Ring colour: | white |
| EAN: | 5905963951299 | Dimensions (H/W/T/S) [mm]: | 340/105 |
| Light source: | LED module | Mounting dimensions [mm]: | 158 |
| Nominal power [W]: | 15 | Impact resistance: | IK07 |
| Rated power of the luminaire [W]: | 16.50 | Ingress protection: | IP54 |
| Supply voltage [V]: | 220-240 | Mounting version: | surface |
| Frequency [Hz]: | 50 - 60 | Working temperature [°C]: | from -10 to +35 |
| Luminous flux [lm]: | 1400 | DIMM DALI: | yes |
| Luminous efficacy [lm/W]: | 86 | Accessories included: | assembly system for IoT, sealing, extraction, 2x cable cover, screws, dowels 6mm |
| Energy efficiency class: | F | Master/slave: | slave |
| Electrical protection class: | II | Dimensions of single box [mm]: | 342/342/122 |
| Colour temperature [K]: | 3000 | Net weight [kg]: | 1.800 |
| Colour rendering index: | 80 | Category type: | bulkheads |
| SDCM: | ≤ 4 | Version: | BT DS HYT DALI |
| Power factor: | 0.95 | AC voltage range [V]: | 220 - 240 |
| LED lifespan L70B50 [h]: | 30000 | UGR (4H8H): | 17,5-25,2 |
| Beam angle [°]: | 120 | Light distribution type: | lamertian |
| Diffuser material: | PC | Product line: | PRO RING |
| Diffuser type: | OPAL | Dimensions of bulk box (H/W/D) [mm]: | 794/1194/982 |
| Diffuser colour: | white | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Optics material: | PMMA | Warranty [years]: | 5 |
| Optics: | lens | CE certificate: | 375/2023 |
| Material of the body: | ABS | Manual: | Download PDF |
| Colour of the body: | white | Plik LDT: | Download |
| Ring material: | ABS | | |

LIGHT CURVES

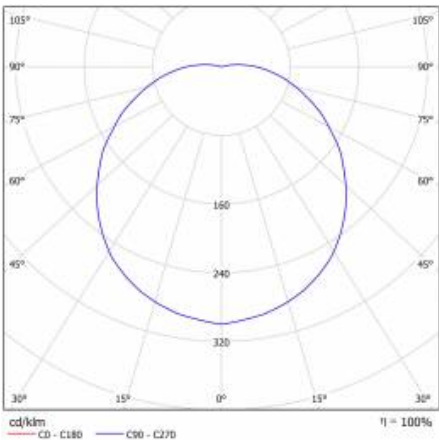

CAPELLA LED PLUS RING PRO TS IOT BT DS HYT DALI 1400LM 830 IP54 WHITE (15W) 340MM

DETAILED CARD
TECHNICAL DETAILS



CAPELLA LED EDGE

Card creation date:10 March 2025
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 375/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl