


MIMO 2 LED BASIC 670MM 1800LM IP66 840 (13W)

DETAILED CARD

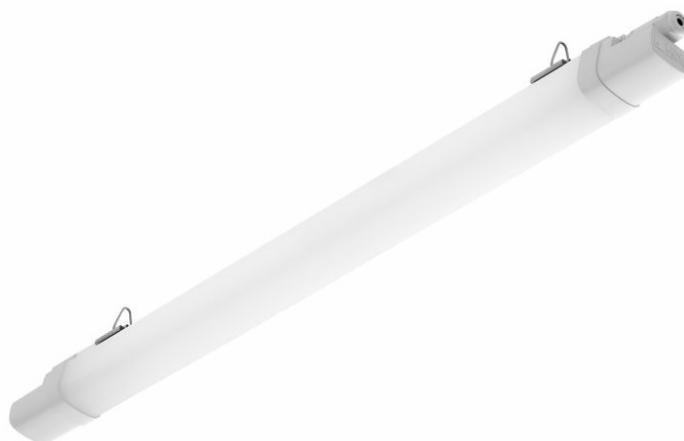

TECHNICAL PARAMETERS

Index:	100765
Ingress protection:	IP66
Impact resistance:	IK06
Nominal power [W]:	13
Luminous flux [lm]*:	1650
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	5
Energy efficiency class:	E
Material of the body:	PC

CHARACTERISTICS

MIMO 2 LED BASIC represents the new generation of hermetic LED luminaires with very high IP66 tightness. The luminaire uses modern concepts to improve light distribution and temperature balance. Its design involved both proven solutions that affect high efficiency and durability, as well as efficient LED modules offering the best lighting level required and energy savings. The multilayer shade has been made of UV-resistant polycarbonate.

APPLICATION

The multifunctional LED luminaire is designed for use in areas with increased dust and humidity. It is particularly suitable for industrial conditions, car parks (underground and multi-storey ones), sports stadiums, warehouses, transport terminals and underground passages. The luminaire is used both in new applications, as well as in replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended installation using standard equipment. The luminaire is intended for general areas inside buildings – store rooms and storage rack areas as well as cold stores included in tables 5.4 and 5.5 of the EN12464 standard; for indoor traffic zones included in table 5.1 of the EN12464 standard and for parking areas and as lighting of railway installations included in table 5.34 and 5.53 of the EN12464 standard, excluding ticket and luggage offices, counters, waiting rooms, entrance halls and lounges.

MIMO 2 LED BASIC 670MM 1800LM IP66 840 (13W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	100765	Mounting dimensions [mm]:	400
EAN:	5905963100765	Impact resistance:	IK06
Light source:	LED module	Ingress protection:	IP66
Nominal power [W]:	13	Mounting version:	surface, suspended
Rated power of the luminaire [W]:	14.90	Working temperature [°C]:	from -20 to +35
Supply voltage [V]:	220-240	Net weight [kg]:	0.175
Frequency [Hz]:	50 - 60	Category type:	battens
Luminous flux [lm]:	1650	AC voltage range [V]:	207 - 253
Luminous efficacy [lm/W]:	111	LED lifespan L70B50 [h]:	70000
Energy efficiency class:	E	LED lifespan L80B10 [h]:	45000
Electrical protection class:	II	LED lifespan L90B10 [h]:	22000
Colour temperature [K]:	4000	Light distribution type:	open space
Color rendering index (Ra) >:	80	Product line:	MIMO 2 LED BASIC
SDCM:	5	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Power factor:	0.99	Warranty [years]:	5
Surge protection [kV]:	1	CE certificate:	152/2023
Diffuser material:	PC	Environmental Product Declaration (EPD):	944/2026
Diffuser type:	matt	Manual:	Download PDF
Material of the body:	PC	ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Colour of the body:	white	Plik LDT:	Download
Dimensions (H/W/T/S) [mm]:	670/45/50		

MIMO 2 LED BASIC 670MM 1800LM IP66 840 (13W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
100673	MIMO 2 LED - double handle (set)
800ML208	IP68 High-bay PA 6.6 connector black DL06-3A-2Y



MIMO 2 LED - double handle (set) (100673)



IP68 High-bay PA 6.6 connector black DL06-3A-2Y (800ML208)

Card creation date: 29 April 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 152/2023