

GAMMA LED BASIC 220 800LM 840 IP54 II KL. OPAL WHITE (8W) 220MM

DETAILED CARD



TECHNICAL PARAMETERS

Index:	226847
Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	8
Luminous flux [lm]*:	800
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	PC
Diffuser material:	PC

CHARACTERISTICS

Surface-mounted, round LED light fitting, ingress protection class IP54, and an integrated energy-saving light source LED. White base; diffuser made of impact-resistant PC provides even light distribution and ensures a high impact resistance class (IK10). Additional overvoltage protection (SP1kV).

APPLICATION

Surface mounted fitting intended for indoor use in representative rooms and passageways (large conference halls, hotel corridors, studies). Designed for mounting on ceilings and walls. Wide range of diameters and two diffuser versions allow for the same fitting to be used in rooms with different parameters. Well suited to be used as a basic or general interior light source.

The luminaire is intended for indoor traffic zones included in table 5.1 of the EN12464 standard.


GAMMA LED BASIC 220 800LM 840 IP54 II KL. OPAL WHITE (8W) 220MM

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø220/72
Nominal power [W]:	8	Mounting dimensions [mm]:	115
Rated power of the luminaire [W]:	8.30	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP54
Luminous flux [lm]:	800	Mounting version:	surface
Luminous efficacy [lm/W]:	100	Working temperature [°C]:	from -10 to +25
Energy efficiency class:	E	Dimensions of single box [mm]:	225/75/225
Electrical protection class:	II	Net weight [kg]:	0.300
Colour temperature [K]:	4000	Warranty [years]:	3
Colour rendering index:	>80	CE certificate:	391/2023
SDCM:	≤ 3	Index:	226847
Power factor:	0.93	EAN:	5905963226847
LED lifespan L70B50 [h]:	90000	Category type:	bulkheads
Surge protection [kV]:	1	Version:	220
Diffuser material:	PC	Vandalproof:	yes
Diffuser type:	OPAL	Light distribution type:	lamertian
Diffuser colour:	white	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Material of the body:	PC	Manual:	Download PDF
Colour of the body:	white		

LIGHT CURVES

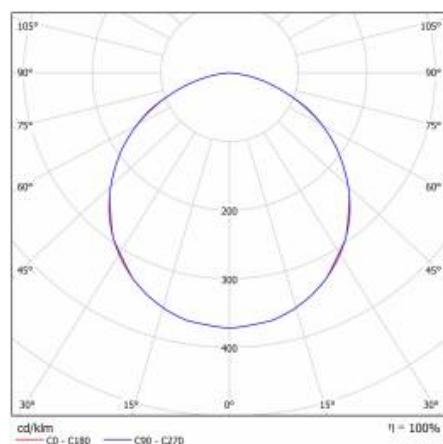

GAMMA LED BASIC 220 800LM 840 IP54 II KL. OPAL WHITE (8W) 220MM


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
754951	Gamma LED Basic 280 1000lm 840 (10W) - light module
754968	Gamma LED Basic 280 1500lm 840 (13W) - light module



Gamma LED Basic 280 1000lm 840 (10W) - light module (754951)



Gamma LED Basic 280 1500lm 840 (13W) - light module (754968)

Card creation date: 19 August 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 391/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl