

ARTO LED 30W 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	019111
Ingress protection:	IP20
Impact resistance:	IK07
Luminous flux [lm]*:	2550
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	F
Material of the body:	powder coated steel
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

Recessed modular fitting with an integrated energy-saving LED GO! panel, made of white powder coated steel. Opal diffuser made of polystyrene ensures even light distribution. The fitting's central part is a blende, which is a component of a modular ceiling. Due to it the fitting can be perfectly matched with the interior's design.

APPLICATION

Multipurpose fitting intended for mounting in modular ceilings in offices, representative rooms or rooms of general use. It can be also used as the main light source and it is suitable for work requiring sight focus. The fitting will be perfect as a new application or while replacing the traditional fluorescent fittings with energy-saving LED solutions.


ARTO LED 30W 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	30	LED lifespan L70B50 [h]:	50000
Index:	019111	Diffuser material:	PS
Colour temperature [K]:	4000	Material of the body:	powder coated steel
Light source:	LED module	Colour of the body:	white
Luminous flux [lm]:	2550	Mounting dimensions [mm]:	595/595
Diffuser type:	OPAL	Impact resistance:	IK07
Rated power of the luminaire [W]:	31	Ingress protection:	IP20
Supply voltage [V]:	220-240	Mounting version:	recessed
Dimensions (H/W/T/S) [mm]:	655/650/87	Working temperature [°C]:	from -20 to +35
Frequency [Hz]:	50 - 60	Net weight [kg]:	5.200
Energy efficiency class:	F	Warranty [years]:	2
Luminous efficacy [lm/W]:	82	CE certificate:	144/2017
Electrical protection class:	I	EAN:	5905963019111
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	Manual:	Download PDF
Power factor:	0.97	Plik LDT:	Download

LIGHT CURVES

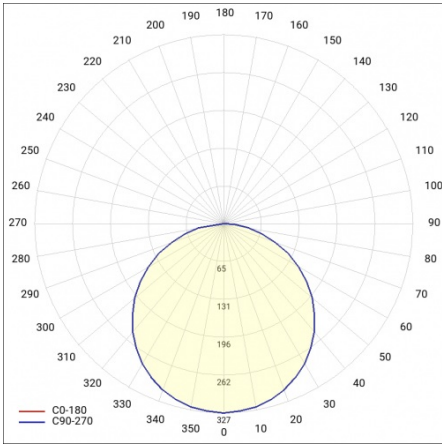


ARTO LED 30W 4000K

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)

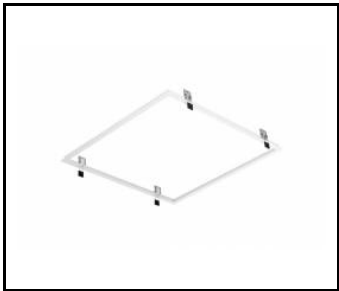

Plasterboard recessing kit 630x630
white (steel version) (999543)

Card creation date: 22 October 2019
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 144/2017



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl